


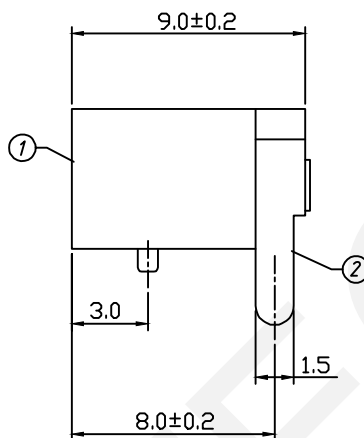


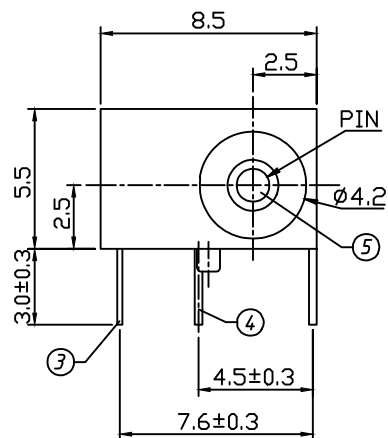


PCB LAYOUT TOP VIEW

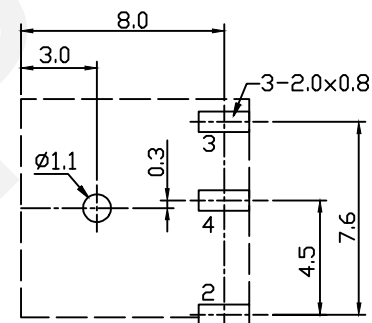


SCHEMATIC



PIN	Ø1.0	Ø1.3
APPD		



RECOMMENDED PLUG



SPECIFICATION

Rated Load:DC 30V 1.0A
 Contact Resistance:30mΩ, Max
 Insulation Resistance:100MΩ, Min
 Withstand Voltage:AC500V
 Actuating Force:3-20N
 Life:5000 Cycles
 Operating Temperature:-30°C-70°C

NO	Description	QTY	Material	Plating
1	Housing	1	PBT	---
2	Flat Piece	1	Brass	Sn-Plating
3	Spring	1	SUS301	Sn-Plating
4	Curve Piece	1	Brass	Sn-Plating
5	PIN	1	Brass	Ni-Plating



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---
0~3	3~18	18~50
50~120		
±0.12	±0.15	±0.3
±0.5		

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

DC POWER Jack DIP

THIRD ANGLE PROJECTION



RHTAYC-038