




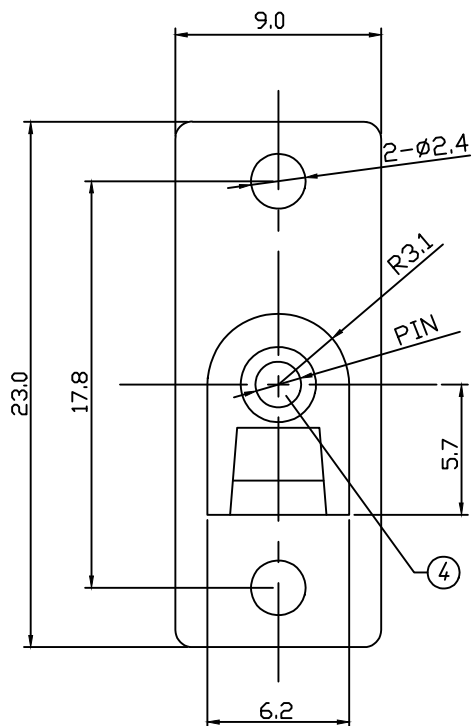


SCHEMATIC



PIN	φ2.0	φ2.5
APPD		

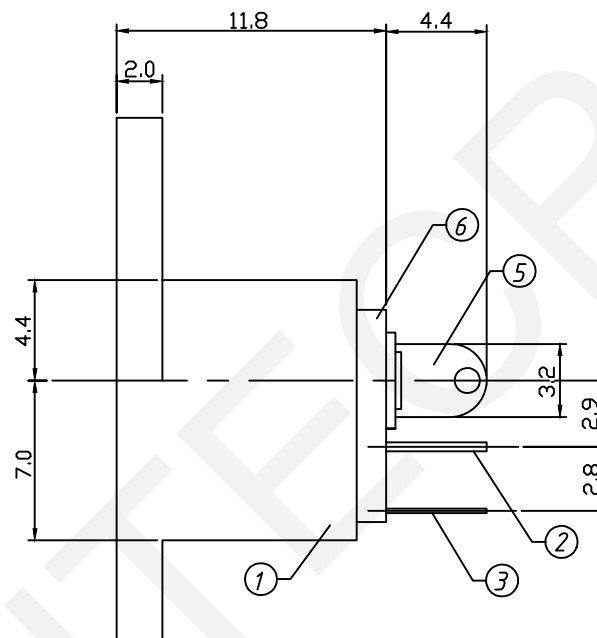

NO	Description	QTY	Material	Plating
1	Housing	1	PA66/PBT	---
2	Flat Piece	1	H62 Brass	Cu-Sn-Plating
3	Spring	1	65Mn Steel	Cu-Sn-Plating
4	PIN	1	H59 Brass	Ni-Plating
5	Contact Foot	1	Brass	Cu-Sn-Plating
6	Cover	1	PA66/PBT	---

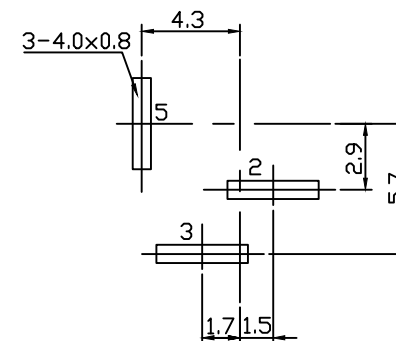

SPECIFICATION

Rated Load:DC 30V 1.0A

Contact Resistance:30mΩ, Max

Insulation Resistance:100MΩ, Min

Withstand Voltage:AC500V

Actuating Force:3-20N

Life:5000 Cycles

Operating Temperature:-30°C-70°C



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

DC POWER Jack DIP

THIRD ANGLE PROJECTION



RHTAYC-044