

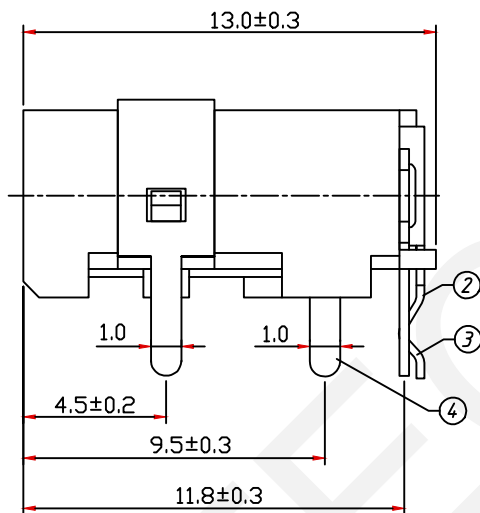




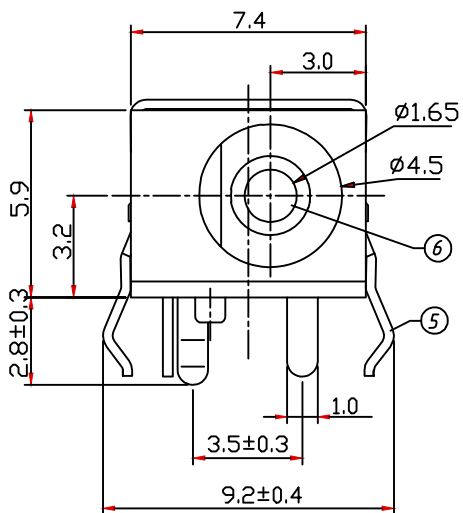


PCB LAYOUT TOP VIEW

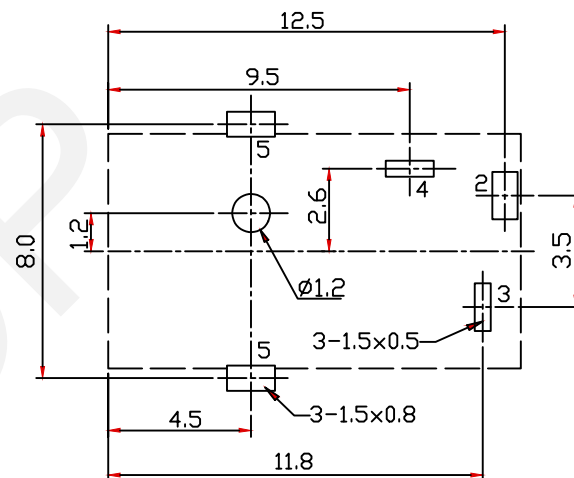

PCB LAYOUT TOP VIEW

SCHEMATIC

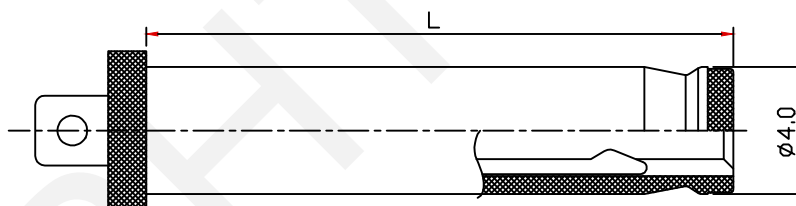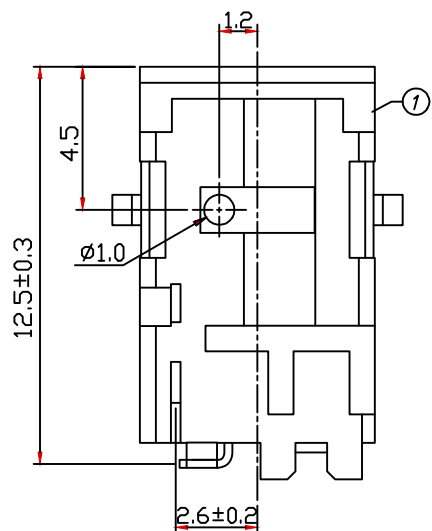

NO	Description	QTY	Material	Plating
1	Housing	1	PBT	---
2	Curve Piece	1	SUS301	Ag-Plating
3	Flat Piece	1	Brass	Ag-Plating
4	Spring	1	Bronze	Ag-Plating
5	Coat	1	Brass	Ag-Plating
6	PIN	1	Brass	Ag-Plating

SPECIFICATION

Rated Load:DC 30V 1.0A
 Contact Resistance:30mΩ, Max
 Insulation Resistance:100MΩ, Min
 Withstand Voltage:AC500V
 Actuating Force:3-20N
 Life:5000 Cycles
 Operating Temperature:-30°C-70°C



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

DC POWER Jack DIP

THIRD ANGLE PROJECTION



RHTAYC-046