


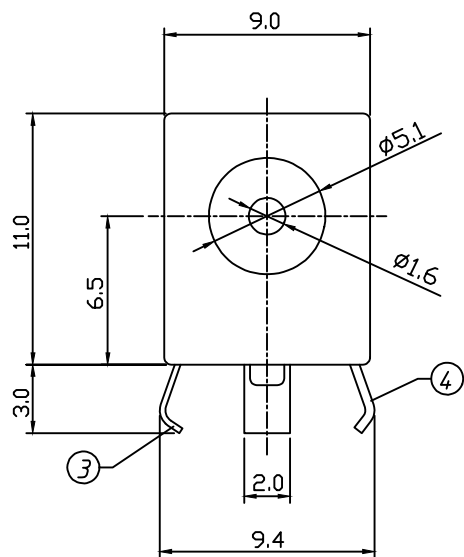


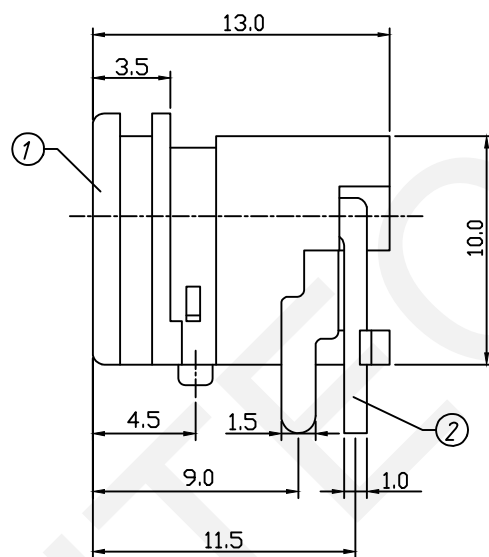

SCHEMATIC



PCB LAYOUT TOP VIEW

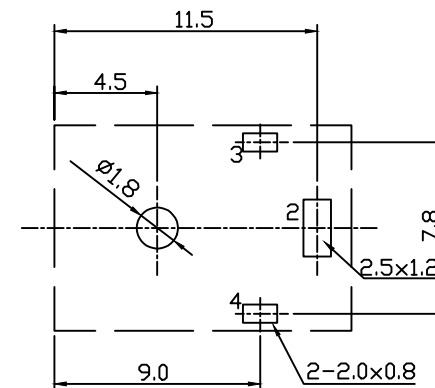

SPECIFICATION

Rated Load:DC 30V 1.0A

Contact Resistance:30mΩ, Max

Insulation Resistance:100MΩ, Min

Withstand Voltage:AC500V

Actuating Force:3~20N

Life:5000 Cycles

Operating Temperature:-30°C~70°C

NO	Description	QTY	Material	Plating
1	Housing	1	PBT/PA66	---
2	PIN	1	Brass	Cu-Sn-Plating
3	Spring	1	Stainless Steel	Ag-Plating
4	Curve Piece	1	Brass	Ag-Plating



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

DC POWER Jack DIP

THIRD ANGLE PROJECTION



RHTAYC-R39