
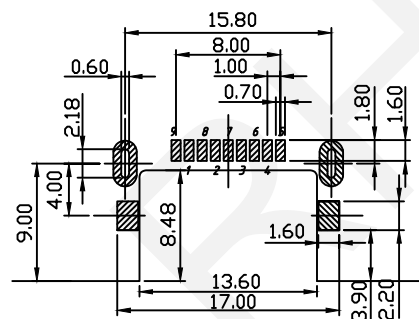




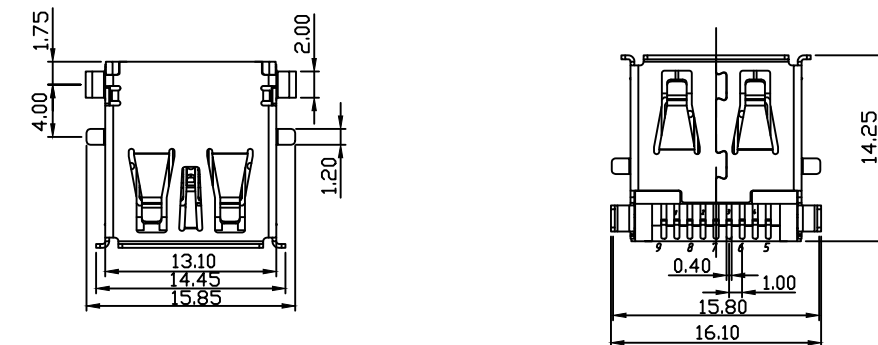

PCB LAYOUT

Material:

Housing: Thermoplastic, Glass Fiber Filled,

Halogen Free, UL94-HB, Color: Blue

Cover: Thermoplastic, Glass Fiber Filled,

Halogen Free, UL94V-0, Color: Black

USB 2.0 Contact: Copper Alloy.

USB 3.0 Contact: Copper Alloy.

Shell: Brass/SPCC

Electrical

Contact Current Rating: 1.5 A For PIN1 & PIN4

0.25 A, Other Contacts

Withstanding Voltage: 100 VAC (RMS)

Contact Resistance: 30 mΩ MAX

Insulator Resistance: 1000 MΩ MIN

Mechanical

Mating Force: 35 N MAX

Withdrawal: 10 N MIN

Durability: 5000 CYCLES

Temperature Range: -40°C +85°C

Order Information

RHTAY010-L

USB 3.0 AF

Color: Light Blue

RHTECP NINGBO RHT ELECTRONIC CO., LTD

UNITS: mm SHEET SIZE: A4 SCALE: ---

0~3 3~18 18~50 50~120

±0.12 ±0.15 ±0.3 ±0.5

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

USB 3.0 Type A Female SMD,

THIRD ANGLE PROJECTION



RHTAY010