

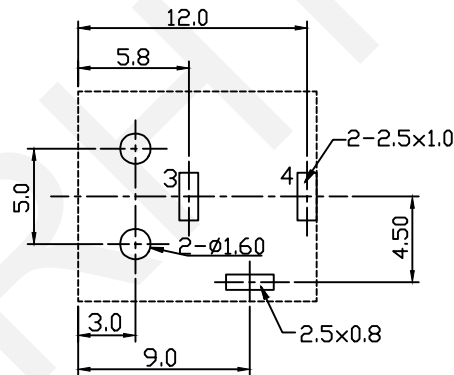
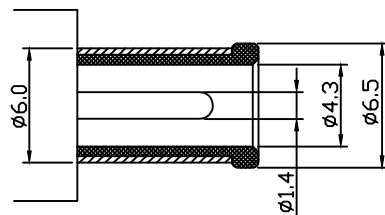
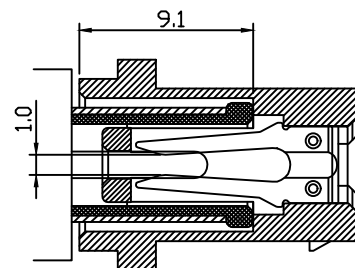


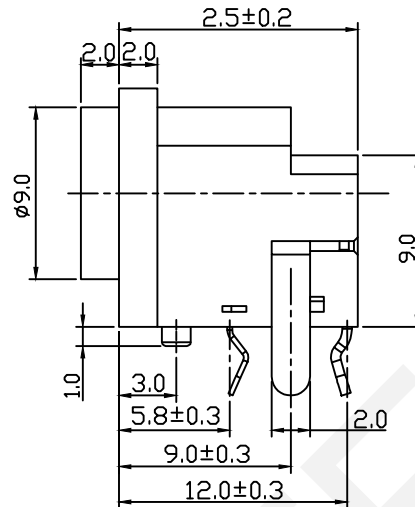


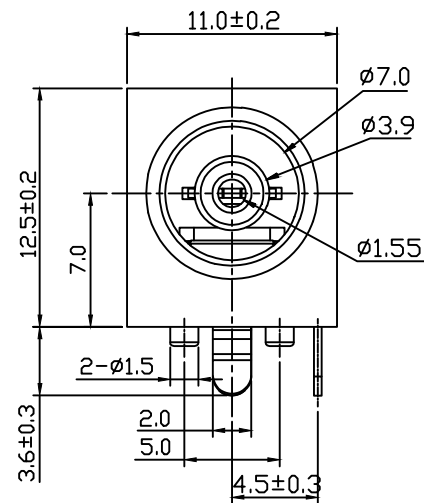

PCB LAYOUT TOP VIEW

SCHEMATIC



SPECIFICATION

Rated Load:DC 30V 1.0A

Contact Resistance:30mΩ, Max

Insulation Resistance:100MΩ, Min

Withstand Voltage:AC500V

Actuating Force:3-20N

Life:5000 Cycles

Operating Temperature:-30°C-70°C

NO	Description	QTY	Material	Plating
1	Housing	1	PA9T	---
2	Curve Piece	1	Brass	Ag-Plating
3	Spring	1	Bronze	Ag-Plating
4	Contact Foot	1	Bronze	Ag-Plating



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---

0~3 3~18 18~50 50~120

±0.12 ±0.15 ±0.3 ±0.5

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

DC POWER Jack DIP

THIRD ANGLE PROJECTION



RHTAYC-050