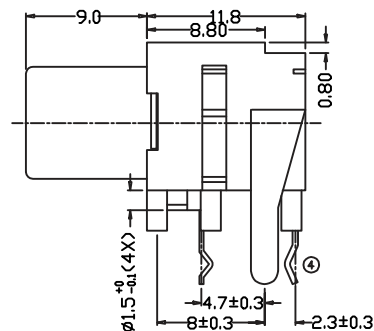



Electrical Specification:

Contact resistance : 30m Ω Max

Insulation resistance : 50M Ω Min at DC 500V

Withstand voltage : AC 500V(50Hz) 1min

Operating Temperature : -25°C~+85°C

Materials:


Housing : PBT UL94V~0

Terminal 1 : C.R.Steel



Terminal 2 : Copper Alloy

Terminal 3 : Brass

Terminal 4 : Copper Alloy



RCA MATE PLUG

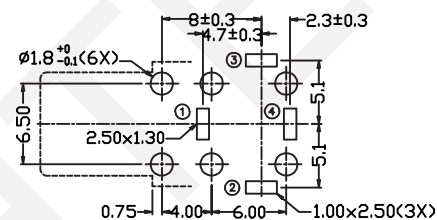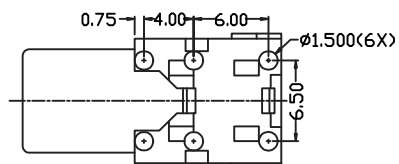

PCB LAYOUT
(BOTTOM VIEW)

ORDER INFORMATION

Product NO.: RHTAYCA-103-4-N-R

MODEL NO.	RHTAYCA-103-4	RHTAYCA-103-3	RHTAYCA-103-2A	RHTAYCA-103-2B
SCHEMATIC				

RCA Jack Type

NiNickel Plated

Color: R:Red ,B:Black

Y:Yellow, W:White,

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

RCA Jack PCB Mount Right Angle

THIRD ANGLE PROJECTION



RHTAYCA-103-4-N-R