
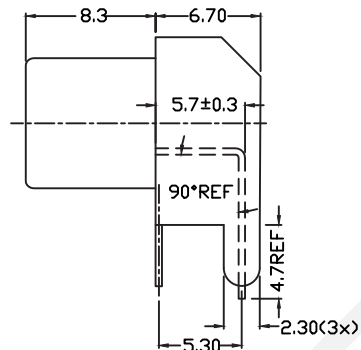



MODEL NO.	RHTAYCA-111
SCHEMATIC	



RCA MATE PLUG

Electrical Specification:

Contact resistance: 0.03Ω, max

Insulation resistance: 100MΩ, min

Rated Load: DC 50V 1A

Withstand voltage: 500V AC /1 minute/50Hz

Insertion Force :5-40 N

Life: 5000 times

Operating Temperature : -25°C~+85°C

Materials:

Insulator : PBT UL94V~0

Body : Steel

Terminal : Brass

ORDER INFORMATION

Product NO.: RHTAYCA-111-N-R

RCA Jack Type

G:Nickel Plated

Color: R:Red ,B:Black

Y:Yellow,W:White,G:Green,L:Blue



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:----
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	


DRWN BY PAN

CHK'D BY FENG




APPR BY ZHAN

Metal R/A PCB Mount RCA Jack


THIRD ANGLE PROJECTION




RHTAYCA-111-N-R

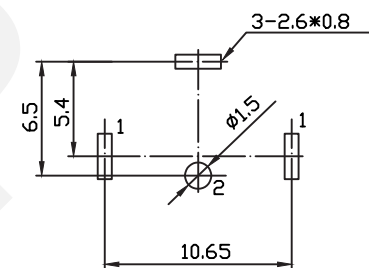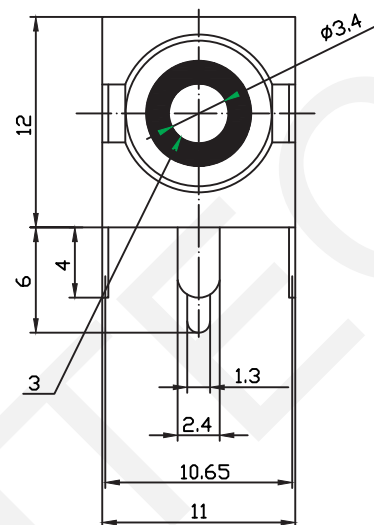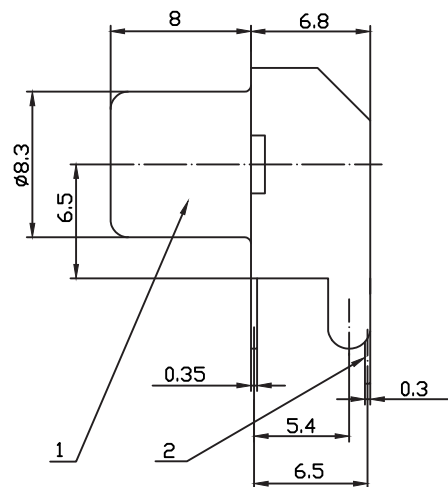

PC installation size chart



Electric schematic diagram



No.	Name	Quantity	Material	Remarks
1	copper bush	1	H62($t=0.35$)	Cu/Ep. CuSn
2	Insert core	1	H62($t=0.3$)	Cu/Ep. SnSb
3	The color circle	1	ABS	Black
4	Plastic core	1	ABS	Black