
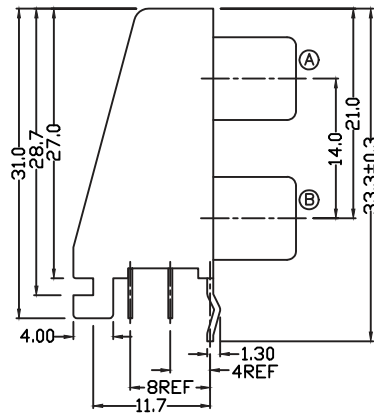
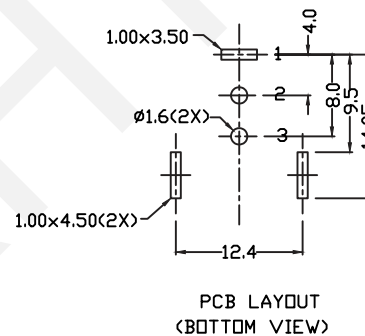


MODEL NO.	RHTAYCA-201
SCHEMATIC	



Electrical Specification:

Contact resistance: 30mΩ Max
 Insulation resistance: 50MΩ Min at DC 500V
 Withstand voltage: AC 500V(50Hz) 1min
 Operating Temperature: -25°C~+85°C




Materials:

Barrel : Steel
 Insulator : PBT UL94V~0
 Insert Ring : ABS UL94V~0
 Center Pin : Brass
 Frame : Steel



ORDER INFORMATION

Product NO.: RHTAYCA-201-N-BK-BK

RCA Jack Type _____
 NiNickel Plated _____
 Color: BK BK:Black Black _____
 WH WH:White White RE RE:Red Red _____
 RE WH:Red White WH RE:White Red _____
 YE RE:Yellow Red _____

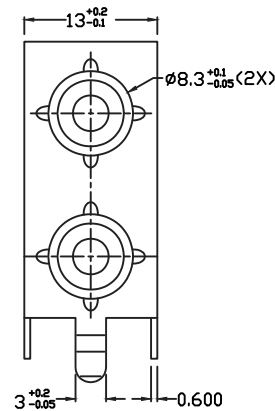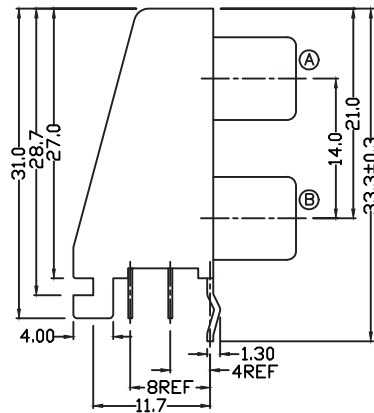

MODEL NO.	RHTAYCA-201
SCHEMATIC	

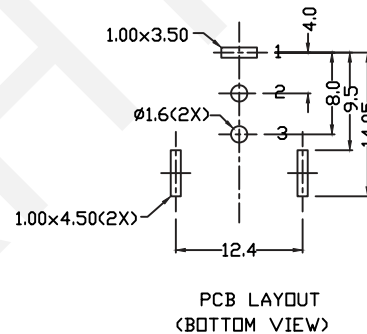

Electrical Specification:

Contact resistance: 30mΩ Max
 Insulation resistance: 50MΩ Min at DC 500V
 Withstand voltage: AC 500V(50Hz) 1min
 Operating Temperature: -25°C~+85°C

Materials:

Barrel : Steel
 Insulator : PBT UL94V~0
 Insert Ring : ABS UL94V~0
 Center Pin : Brass
 Frame : Steel

ORDER INFORMATION

Product NO.: RHTAYCA-201-G-BK-BK

RCA Jack Type _____
 G: Gold Plated _____
 Color: BK BK: Black Black _____
 WH WH: White White RE RE: Red Red _____
 RE WH: Red White WH RE: White Red _____
 YE RE: Yellow Red _____