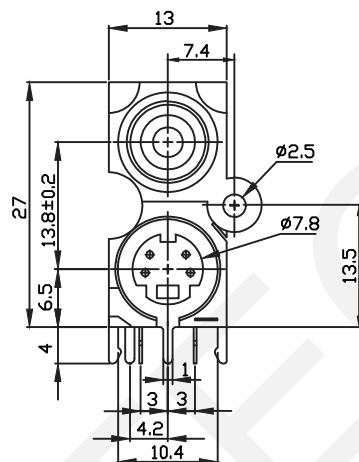
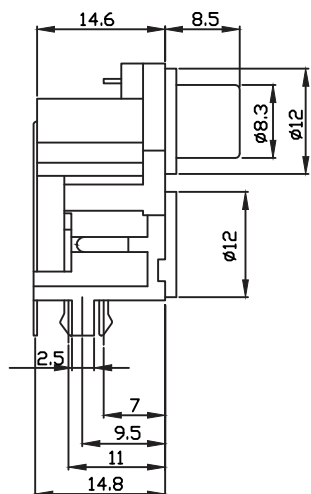


T:1.6 Dimensions of PC board holes  
Tolerance :  $\pm 0.1$ (Printed-top view)

#### Electrical Specification:

Contact resistance : 30m $\Omega$  Max

Insulation resistance : 50M $\Omega$  Min at DC 500V

Withstand voltage : AC 500V(50Hz) 1min

Operating Temperature : -25°C~+85°C

#### Materials:

Sealed Plate : Steel

Earth Fitting : Brass

Terminal : Brass

Housing : PBT UL94V~0

Washer : ABS UL94V~0

Outer Contact : Brass

Ground Contact : Brass

Center Contact : Brass

| MODEL NO. | RHTAYCA-204 |          |
|-----------|-------------|----------|
|           | S JACK      | PIN JACK |
| SCHEMATIC |             |          |

#### ORDER INFORMATION

Product NO.: RHTAYCA-204-N-R

RCA Jack Type

NiNickel Plated

Color: R:Red ,B:Black

Y:Yellow, W:White,

NINGBO RHT ELECTRONIC CO.,LTD

| UNITS:mm   | SHEET SIZE: A4 |           | SCALE:--- |
|------------|----------------|-----------|-----------|
| 0~3        | 3~18           | 18~50     | 50~120    |
| $\pm 0.12$ | $\pm 0.15$     | $\pm 0.3$ | $\pm 0.5$ |


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

PIN Jack+S PCB Mount R/A Jack

THIRD ANGLE PROJECTION



RHTAYCA-204-N-R