

Electrical Specification:

Contact resistance: 30mΩ Max

Insulation resistance: 50MΩ Min at DC 500V

Withstand voltage: AC 500V(50Hz) 1min

Operating Temperature: -25°C~+85°C



Materials:

Terminal : Brass

Shield Pin : Steel


Washer : PBT UL94V~0

Housing : PBT UL94V~0

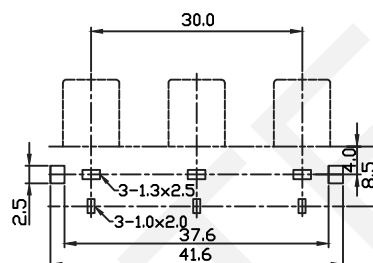

ORDER INFORMATION

Product NO.: RHTAYCA-306-N-YE-WH-RE

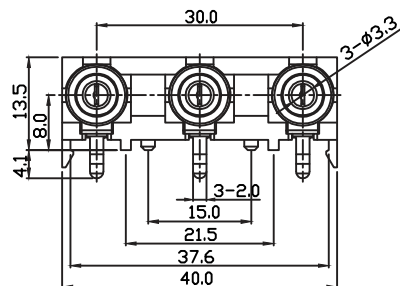

PCB LAYOUT
(BOTTOM VIEW)

MODEL NO.	RHTAYCA-306		
SCHEMATIC			

RCA Jack Type

G-Nickel Plated

Color: YE WH-RE

Yellow-White Red

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

R/A PCB Mount RCA Jack

THIRD ANGLE PROJECTION



RHTAYCA-306-N-YE-WH-RE