
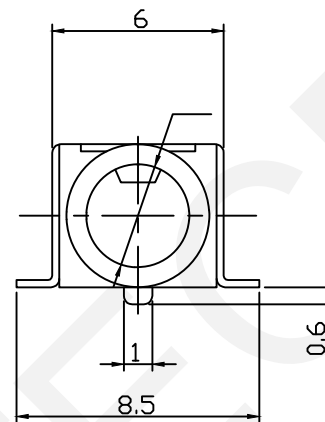


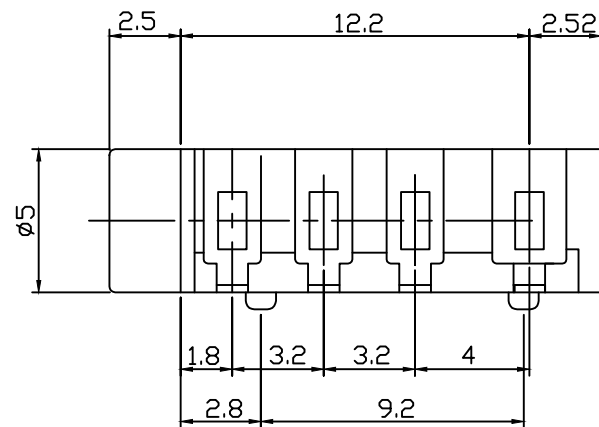

Notes:

1.Material:

Spring Piece:C5191, Ag-Plating

Housing:PPA

2.Electric:

Rating:DC 30V 0.5A


Contact Resistance:0.03Ω Max

Insulation Resistance:100MΩ Min(DC250V)


Withstand Voltage:500VAC

Insertion And Extraction Force:3~20N

Life Test:5,000 Cycles

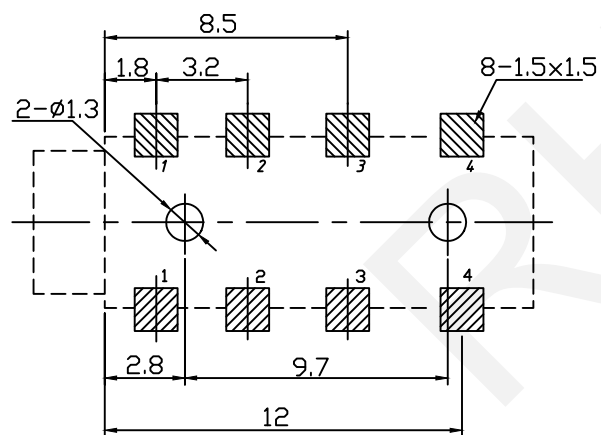

Schematic



RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

3.5mm Phone Jack Connectors

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYPJ3.5-013