

Circuit diagram

Electrical :

Electrical Rating:5A/80A 250VAC



Ambient temperature:-25°C~+85°C

Contact Resistance:50mΩ Max.

Insulation Resistance:100MΩ Min.

Dielectric strength:≥1500V;

Between terminals and frame≥3000V

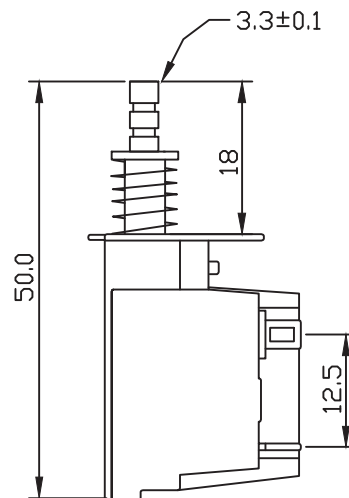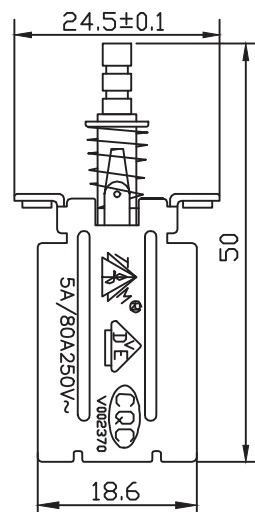

Mechanical:

Actuating Force:5±3N

Life:10000 cycles

ORDER INFORMATION

RHTGYS-004-L

Switches No.

Function:L=Lock,N=Unlock

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Push Switches

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTGYS-001