

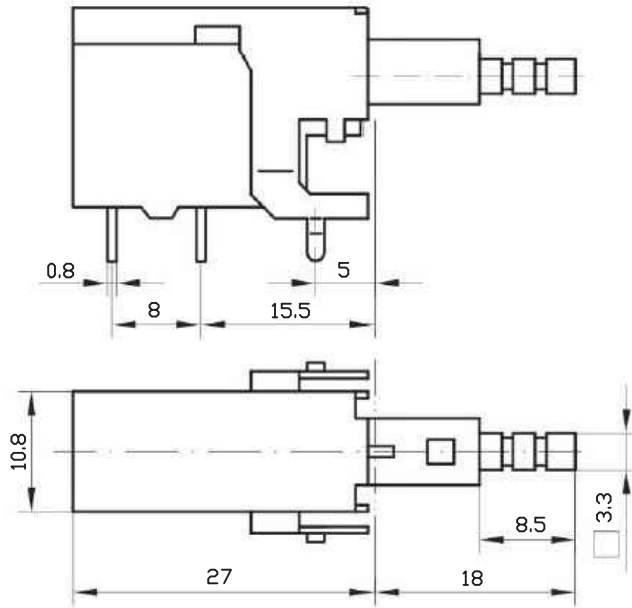


	1	2	3	4	5	6	7	8	9
A									A
B									B
C									C
D									D
E									E
F									F
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4 SCALE: ---	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	Power Switch,Soldering Pin,self-locking,RoHS THIRD ANGLE PROJECTION 	RHTGYS-001B	G
	1	2	3	4	5	6	7	8	9

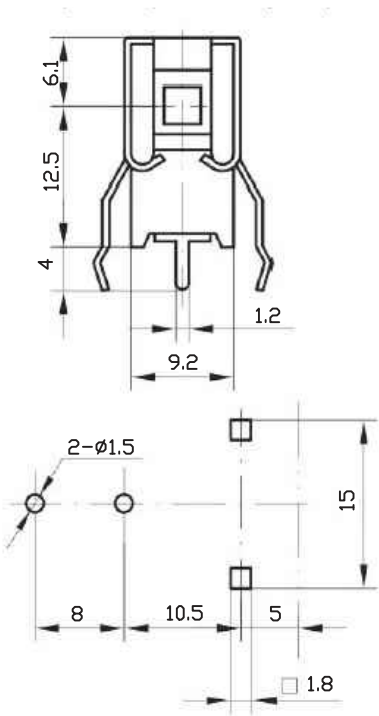

Electrical :
Contact Resistance:30mΩ Max.
Insulation Resistance:100MΩ Min.
Rated load:5A/80A 250V AC
Withstand Voltage:AC 1500V(e-e),AC3500V(e-and)

Mechanical:
Life:10000 cycles
Actuating Force:2~8N
Use temperature scope: -20-85℃

ORDER INFORMATION

RHTGYS-001B-L

Switches No.└

Function:L=Lock,N=Unlock└