

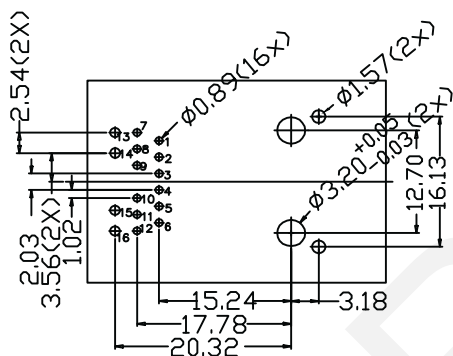

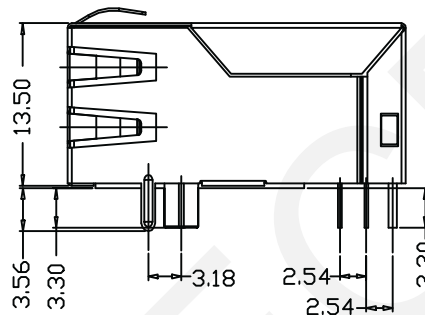


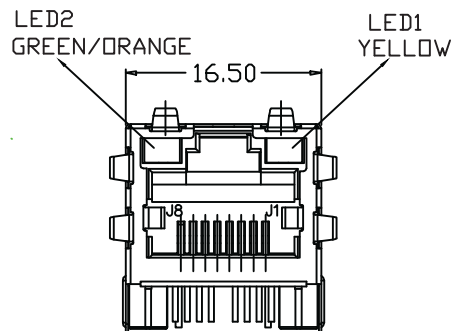

Recommend P.C.B Layout
viewed From Component Side

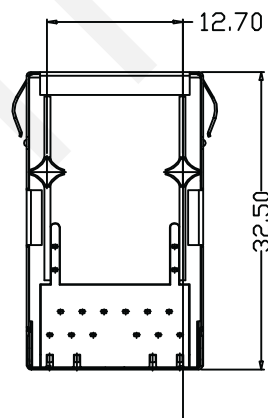

Order Information

RHTLYL094-1X1-G0

Part Number

Ports :1x1 Ports

LED Style:G/Orange/Yellow

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1000 Base 1x1 Tab-up RJ45

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTLYL094-1X1-G0



±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

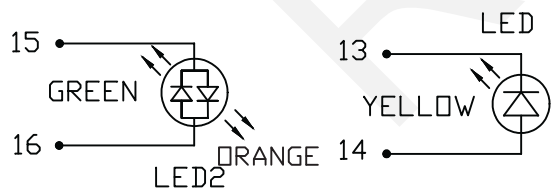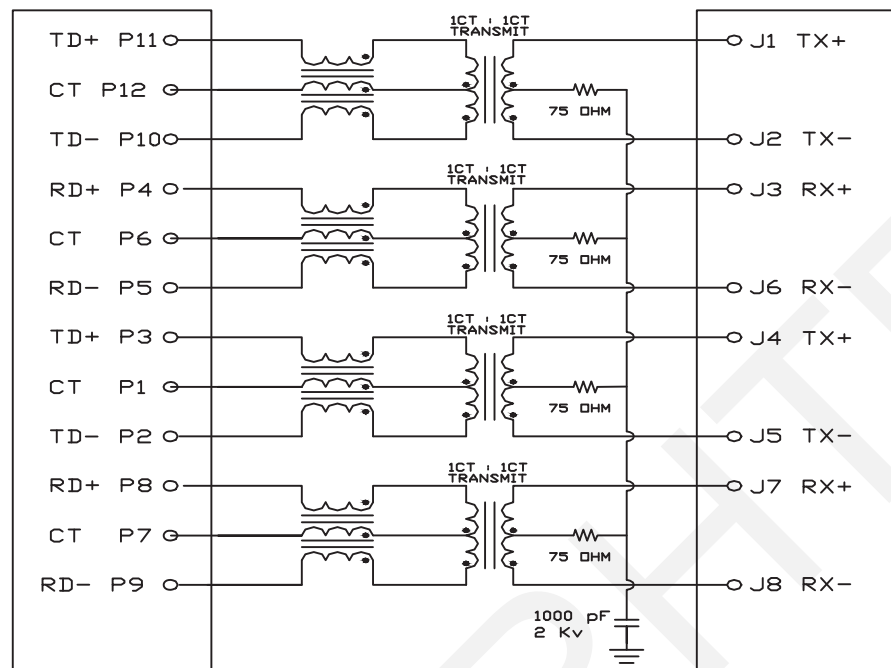

Electrical Specifications:

Insertion Loss: 1-100MHZ -1.0dB MAX

Return Loss: 1-30MHZ -16.0dB MIN
30-60MHZ -14.0dB MIN
60-80MHZ -10.0dB MIN

Cross Talk: 1-30MHZ -40.0dB MIN
30-60MHZ -35.0dB MIN
60-80MHZ -30.0dB MIN

CMR: 1M-100MHZ -35dB MIN

Hi-Pot: 1500v AC 6S 1mA

Turn Ratio: 1CT:1CT+/-3%

DCL:350uH MIN @ 100KHZ 100mV 8mA DC

Contacts:

0.35mm thick phos bronze plated with 6u' gold in contact area

Housing Material:PBT Black

Operating temperature range: 40℃~+85℃

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1000 Base 1x1 Tab-up RJ45

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTLYL094-1X1-G0

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN