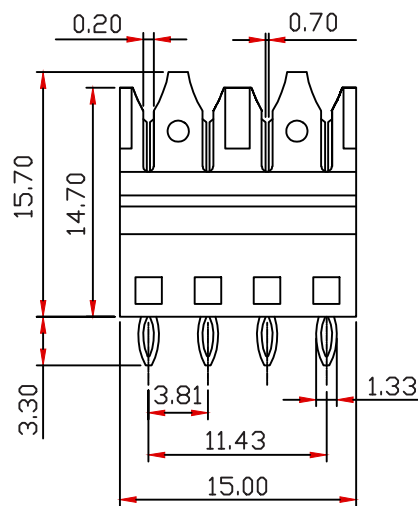


PCB LAYOUT
Tol:±0.05mm

Material & Process

Housing: PC

Flammability Rating: UL94V-0

Contacts: Phosphor Bronze, T=0.80mm

Plating: TIN Plating

Electrical Performance

Voltage Rating: 125VAC

Current Rating: 1.5A

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min. at 500V DC

Dielectric Strength: 1000V Rms 50Hz, 1 Min.

Durability: 750 cycles Min.

Operation Temperature: -40°C~85°C

Order Information

Model Example: RHTLYM110-12-XP

Contacts:

4P-2 Pair IDC Connector

8P-4 Pair IDC Connector

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Krone IDC Block PCB-PLUS

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTLYM110-12-4P

