



Front view



Back view

No.	Solder inter diamte	Contacts resistance Max.
2	Ø1.6mm	6 mΩ
3	Ø1.6mm	6 mΩ
4	Ø1.0mm	3 mΩ
5	Ø1.0mm	3 mΩ
6	Ø1.0mm	3 mΩ
7	Ø1.0mm	3 mΩ
8	Ø1.0mm	3 mΩ
10	Ø1.0mm	3 mΩ
12	Ø1.0mm	3 mΩ

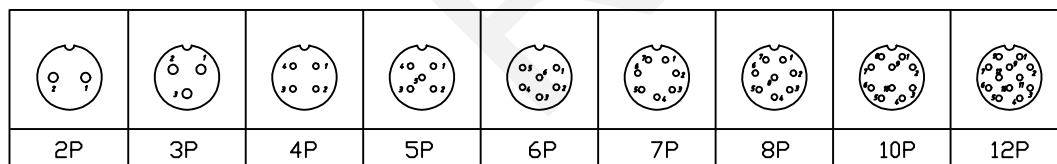

Material:
 Contact: Brass,Gold Plated/Silver plated
 Connector Body: PA66+30%GF
 Insert Body: PA66+30%GF
 Sealing: O-ring
 Electrical & Mechanical data
 Waterproof Rating: IP67,Mated
 Current Rating: 10A
 Voltage Rating: 200V
 Insulation resistance: 2000 MΩ Min.
 Withstanding Voltage: 1500V AC
 Cable ØD: Ø3.5~6.5mm
 Orientation: Straight
 Mating Life: 500 cycles Min.
 Temperature Range: -40°C~+105°C

Order information

RHTAY49- XX F1

XX: Number of Contacts
 F1: Female Type,Quick Lock

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---
0~3	3~18	18~50
50~120		
±0.12	±0.15	±0.3
		±0.5


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

IP67 Circular Connectors, Quick lock,
 Female Plug

THIRD ANGLE PROJECTION



RHTAY49-xF1