

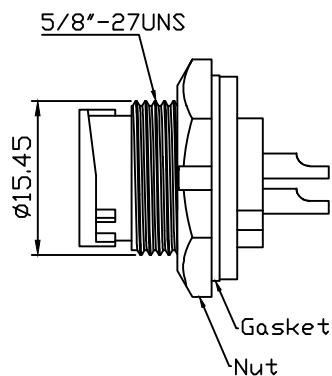


Panel Cut-out



Protection cap for Male panel mount connector

NO	Solder inter diamte	Contacts resistance Max.
2	Ø1.6mm	6 mΩ
3	Ø1.6mm	6 mΩ
4	Ø1.0mm	3 mΩ
5	Ø1.0mm	3 mΩ
6	Ø1.0mm	3 mΩ
7	Ø1.0mm	3 mΩ
8	Ø1.0mm	3 mΩ
10	Ø1.0mm	3 mΩ
12	Ø1.0mm	3 mΩ

Material:

Contact: Brass,Gold Plated/Silver plated

Connector Body: PA66+30%GF

Insert Body: PA66+30%GF

Electrical & Mechanical data

Waterproof Rating: IP67,Mated

Current Rating: 10A

Voltage Rating: 200V


Insulation resistance: 2000 MΩ Min.

Withstanding Voltage: 1500V AC

Orientation: Panel, Solder

Mating Life: 500 cycles Min.

Temperature Range: -40°C~+105°C

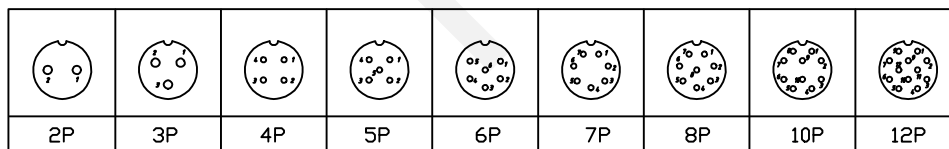

Order information

RHTAY49- XX M1

XX: Number of Contacts

M1: Male Type,Quick Lock

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

IP67 Circular Connectors, Quick lock;
Male Jack,for Panel,Solder

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12


±0.15

±0.3

±0.5

APPR BY ZHAN

THIRD ANGLE PROJECTION



RHTAY49-xM1