
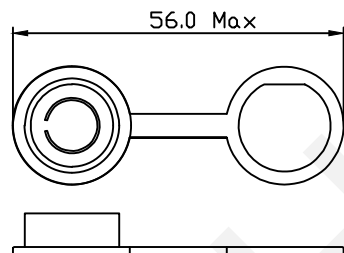
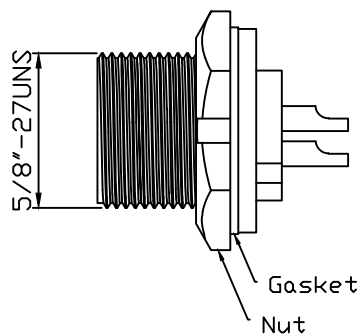


Panel Cut-out



Protection cap for Male panel mount connector

NO	Solder inter diamte	Contacts resistance Max.
2	Ø1.6mm	6 mΩ
3	Ø1.6mm	6 mΩ
4	Ø1.0mm	3 mΩ
5	Ø1.0mm	3 mΩ
6	Ø1.0mm	3 mΩ
7	Ø1.0mm	3 mΩ
8	Ø1.0mm	3 mΩ
10	Ø1.0mm	3 mΩ
12	Ø1.0mm	3 mΩ

2P	3P	4P	5P	6P	7P	8P	10P	12P

Material:

Contact: Brass,Gold Plated/Silver plated

Connector Body: PA66+30%GF

Insert Body: PA66+30%GF

Electrical & Mechanical data

Waterproof Rating: IP67,Mated

Current Rating: 10A

Voltage Rating: 200V

Insulation resistance: 2000 MΩ Min.

Withstanding Voltage: 1500V AC

Orientation: Panel, Solder

Mating Life: 500 cycles Min.

Temperature Range: -40°C~+105°C

Order information

RHTAY49- XX M2

XX: Number of Contacts

M2: Male Type,Screw thread

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---
0~3	3~18	18~50
50~120		
±0.12	±0.15	±0.3
		±0.5


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

IP67 Circular Connectors,Screw thread;
Male Jack,for Panel,Solder

THIRD ANGLE PROJECTION



RHTAY49-xM2