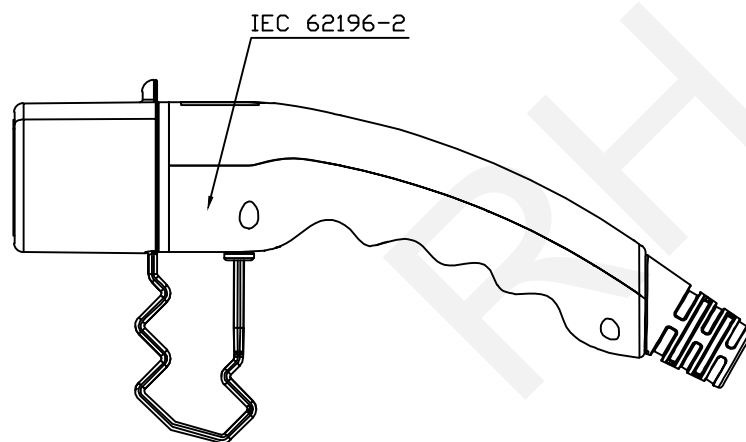
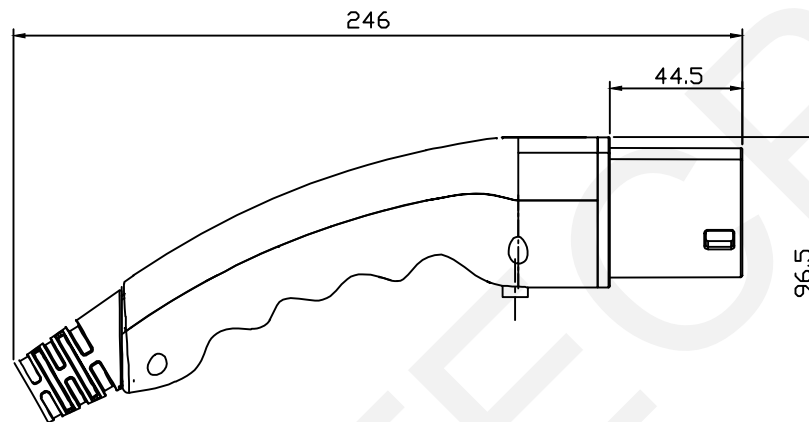
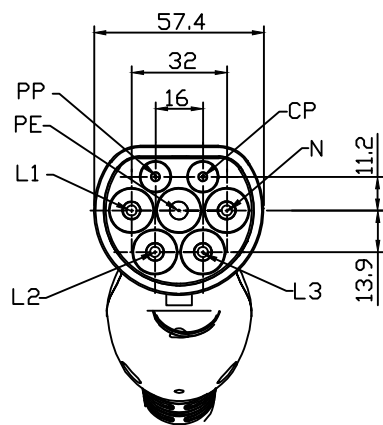


Notes:

1.Material:

Housing:Thermo Plastic

Silicon Rubber,UL94V-0

Contact:Copper Alloy

2.Electric:

Rated Current:32A 3P

Rated Voltage:380V~450V

Resistance Voltage:2000V

Contact Resistance:0.5 mΩ Max

Insulator Resistance:1000 MΩ Min

Life:10000 Times Min

Water Proof rating:IP54

Operating Temperature:-30°C~+50°C

Cable Specification

Function:	32A 380V~450V AC
L1(1):	6mm ² Brown
L2(2):	6mm ² Black
L3(3):	6mm ² Grey
N(4):	6mm ² Blue
PE(5):	6mm ² Olivine
CP(6):	0.5mm ² Black
PP(7):	0.5mm ² Grey

