

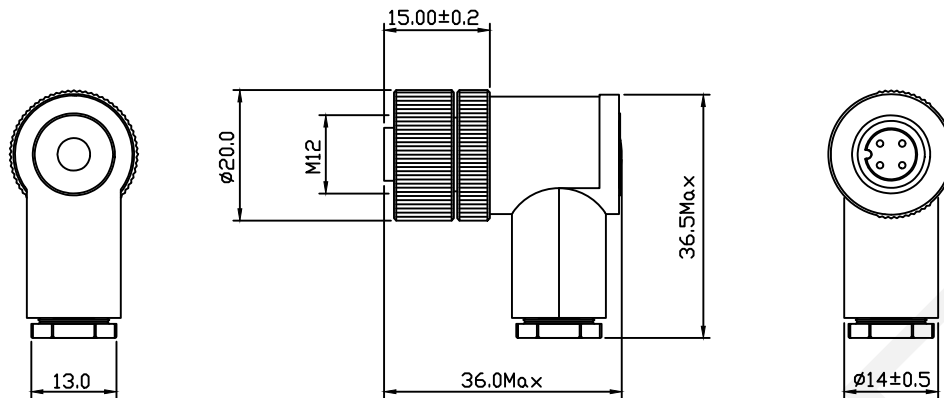


RHTDY12A-TR204PG7




RHTDY12A-TR205PG7





RHTDY12A-TR208PG7

No. of Pin	04 P	05 P	08 P
Rated current	4A	4A	2A
Rated voltage	250V	60V	30V




Cable outlet PG7


Material:
Insulation:PBT/PA,UL94V-0,Black.
Connector Pin:Brass,0.025u"Gold plated
Nut/Screw:Brass,Nickel plating
Electrical Characteristics:
Contact Resistance:5mΩ Max
Insulation resistance:100 MΩ Min
Mechanical properties:
IP rating:IP67
Wire gauge:24AWG/0.25mm²
Mechanical characteristics:mating/cycle>100 cycle
Operating Temperature:-40°C~+85°C
Order Information:
RHTDY12 A-TR2 04 PG7
Screw type:M12
A:A-Coding
Type
TR1:R/A Plug Code(Male Pin)
TR2:R/A Plug Code(Female Pin)
Number of Contacts:(04P 05P 08P)
Cable outlet PG7 or PG9

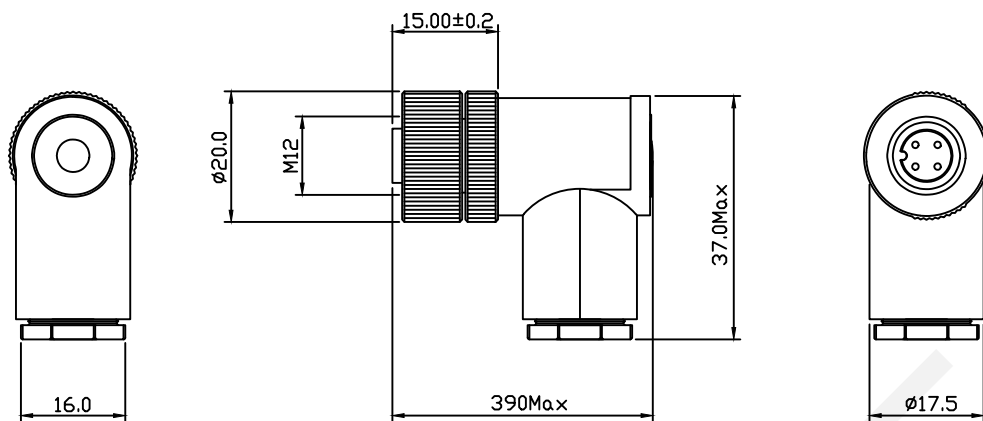

RHTDY12A-TR204PG9




RHTDY12A-TR205PG9



RHTDY12A-TR208PG9

No. of Pin	04 P	05 P	08 P
Rated current	4A	4A	2A
Rated voltage	250V	60V	30V



Cable outlet PG7

Material:

Insulation:PBT/PA,UL94 V-0,Black.

Connector Pin:Brass,0.025u"Gold plated

Nut/Screw:Brass,Nickel plating

Electrical Characteristics:

Contact Resistance:5mΩ Max

Insulation resistance:100 MΩ Min

Mechanical properties:

IP rating:IP67

Wire gauge:24AWG/0.25mm²

Mechanical characteristics:mating/cycle>100 cycle

Operating Temperature:-40°C~+85°C

Order Information:

RHTDY12 A-TR2 04 PG9

Screw type:M12

A:A-Coding

Type

TR1:R/A Plug Code(Male Pin)

TR2:R/A Plug Code(Female Pin)

Number of Contacts:(04P 05P 08P)

Cable outlet PG7 or PG9

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---
0~3	3~18	18~50
50~120		
±0.12	±0.15	±0.3
		±0.5


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

M12 IP67 Waterproof circular
plug Female connector

THIRD ANGLE PROJECTION



RHTDY12A-TR204PG9