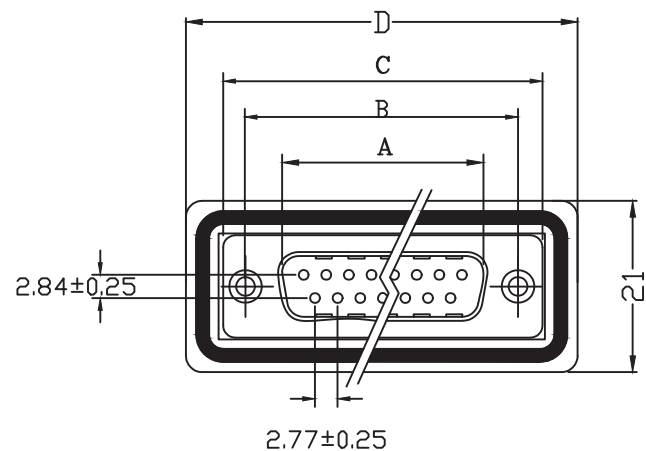


No. of Contacts	A±0.25	B±0.13	C±0.38	D±0.25
09	16.92	24.99	30.81	39.6
15	25.25	33.32	39.14	48
25	38.96	47.04	53.04	61.6
37	55.42	63.5	69.32	78

Technical parameters:

- 1.Contact Current Rating:5 AMPS
 - 2.Contact Resistance:30 Milliohms MAX.
 - 3.Dielectric Withstanding Voltage: 1000 V AC MIN.
 - 4.Insulation Resistance:5000 Megaohms MIN.
 - 5.Temperature Rating:-55°C+105°C.
- Material:
- 1.Insulator:PBT Thermoplastic,+30 %Glass Fiber UL94V-0 Rated
 - 2.Contact:Brass
 - 3.Contact Finish:Full Gold Finished With #4-40 Threaded Rivets
 - 4.Shell:Steel Material,Front Nickel Finished Back Shell Tin Finishe

ORDER INFORMATION

Product NO.: RHTAY26-15-M-L-1

Contact Number of Row

26=DB Series

Number of Contacts

M=Male F=Female

L=Blue B=Black

1U" OR 2U"

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

D-sub,Machined Pin,Solder Type Straight

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15




±0.3

±0.5

APPR BY ZHAN



RHTAY26-15-M-L-1

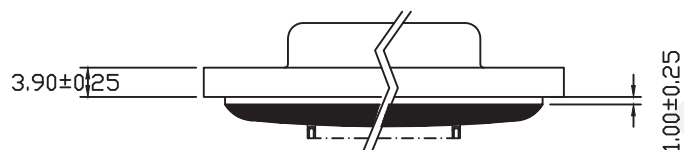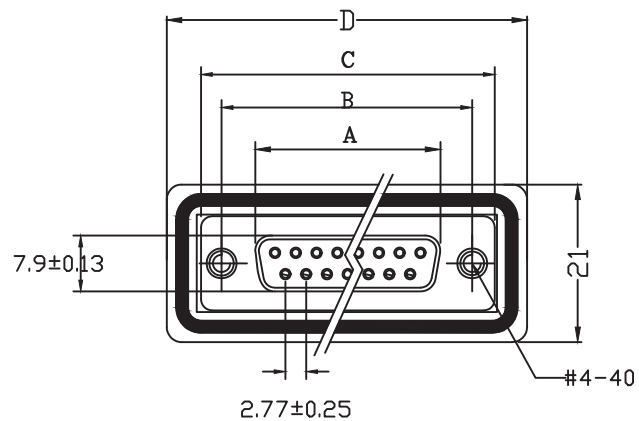

No.of Contacts	A±0.25	B±0.13	C±0.38	D±0.25
09	16.33	24.99	30.81	39.6
15	24.66	33.32	39.14	48
25	38.38	47.07	53.04	61.6
37	54.84	63.5	69.32	78

Technical parameters:

- 1.Contact Current Rating:5 AMPS
- 2.Contact Resistance:30 Milliohms MAX.
- 3.Dielectric Withstanding Voltage: 1000 V AC MIN.
- 4.Insulation Resistance:5000 Megaohms MIN.
- 5.Temperature Rating:-55°C+105°C.

Material:

- 1.Insulator:PBT Thermoplastic,+30 %Glass Fiber UL94V-0 Rated
- 2.Contact:Brass
- 3.Contact Finish:Full Gold Finished With #4-40 Threaded Rivets
- 4.Shell:Steel Material,Front Nickel Finished Back Shell Tin Finishe

ORDER INFORMATION

Product NO: RHTAY26-15-F-B-1

Contact Number of Row

26=DB Series

Number of Contacts

M=Male F=Female

L=Blue B=Black

1U" OR 2U"


RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

D-sub,Machined Pin,Solder Type Straight

THIRD ANGLE PROJECTION



RHTAY26-15-F-B-1