

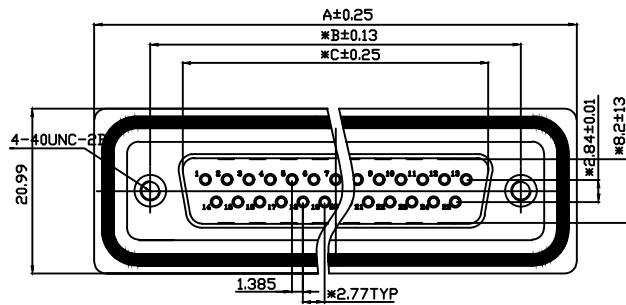


Locking Screws, 2 PCS

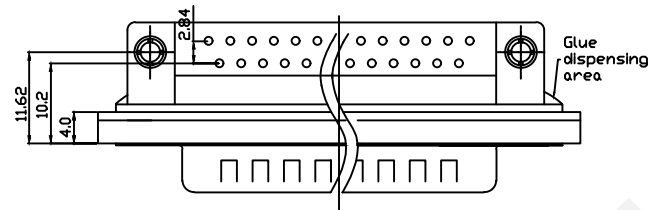

PIN	A	B	C	D
9	39.40	24.99	16.92	19.92
15	47.72	33.32	25.35	28.35
25	61.44	47.04	38.96	41.96
37	77.90	63.50	55.42	58.42

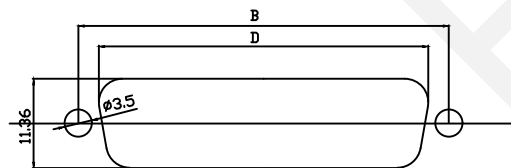

Description:

1 Features:

Waterproof grade: IP66~IP68 (temporary invasion did not, the biggest extreme pressure 1.3psi or 1 m water depth)

Rated voltage: 500V AC MIN

Rated current: 5A

Contact resistance: 30mΩ MAX.

Insulation resistance: 5000MΩ MIN. at 500V DC

Rated voltage: 500V AC RMS for 1Minute

Temperature range: -55°C~+105°C

Wire core range: 22AWG~26AWG

(2) Material:

Plastic core: PBT +30% G.F (UL94V-0)-WH

Car PIN: C3604 (BRASS), gold-plated 1u", 3u", 10u", 15u", 30u", 50u"

Iron Shell: SPCC, nickel-plated

3 Note:

a. Enclosure can not have bubbles, glue seepage phenomena.

b. Spray tested 48H can not have oxidation rusting.

c. Finished not have a curved needle, R angular inconsistencies and other undesirable.

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

Waterproof D-sub (DR 2 Row PCB Type)

THIRD ANGLE PROJECTION



RHTAY27-09-M-B