


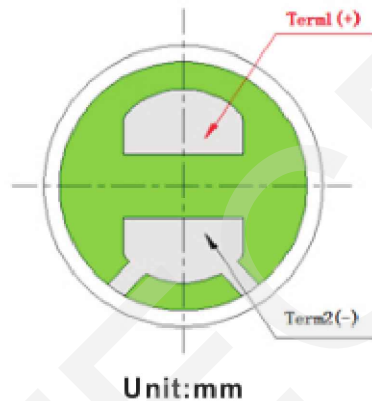
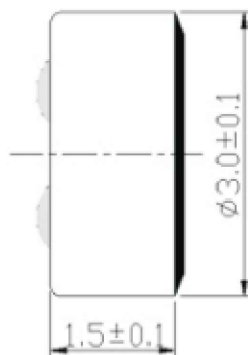


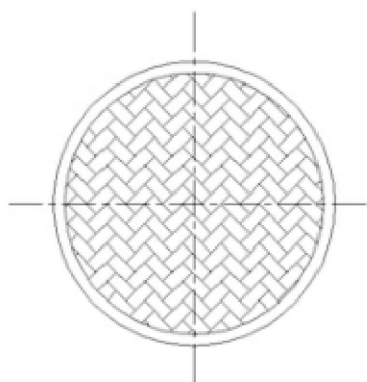

Specifications:
Sensitivity(1KHz,0dB=1V/Pa):-46±3dB ; -44±3dB
Directivity:Omni-directional
Impedance:2.2KΩ Max.
Current consumption:0.5mA Max.
Operation voltage:1.0~10V
S/N ratio:60dB Min.
Sensitivity vs. Voltage:3dB Max. at VS=2.0V~1.5V
Std. Test Condition:94dB S.P.L @1KHz VS=2.0V
Frequency:20~16,000Hz

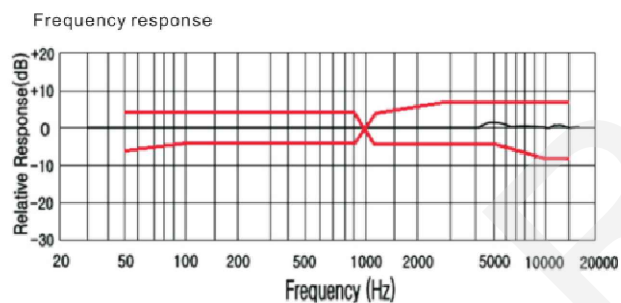

Schematic diagram VS=2V RL=2.2KΩ

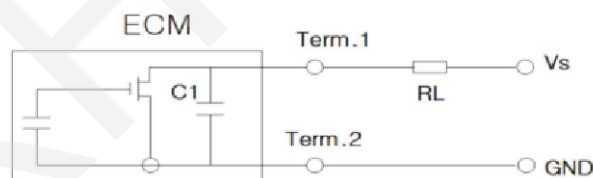

ORDER INFORMATION

Product NO: RHTCYM 3015 P - 443

Omni-Direction mini microphone Series

Dimensions

Note: Soldering: P:Pin Type W:Wire type

Sensitivity

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Omni-direction mini microphone M3015 Serie

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTCYM3015P-443