




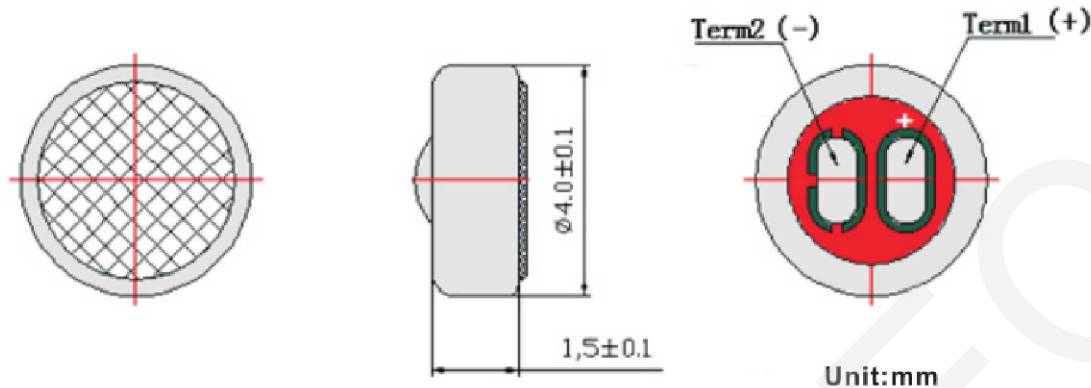

Sensitivity: 1KHz, 0dB=1V/Pa;
 -32±3dB, -34±3dB, -36±3dB, -38±3dB
 Directivity: Omnidirectional
 Impedance: 2.2KΩ Max.
 Current consumption: 0.5mA Max.
 Operation voltage: 1.0~10V
 S/N ratio: 60dB Min.
 Sensitivity vs. Voltage: 3dB Max. at VS=2.0V~1.5V
 Std. Test Condition: 94dB S.P.L @1KHz VS=2.0V
 Frequency: 20~16,000Hz

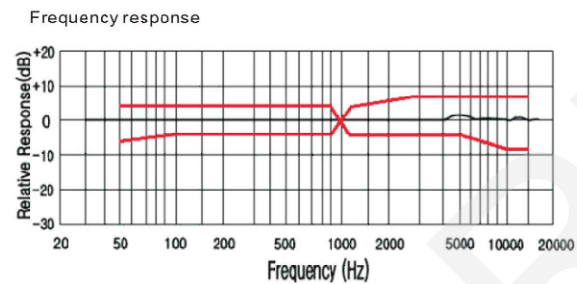

Schematic diagram VS=2V RL=2.2KΩ

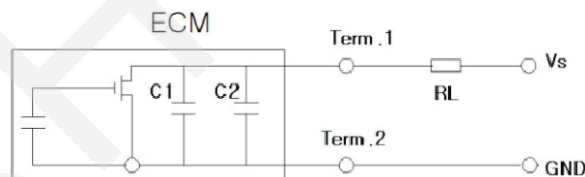

ORDER INFORMATION

Product NO.: RHTCYM 4015 P - 323

Omni-Direction mini microphone Series

Dimensions

Note: Soldering: Pin Type Wire type

Sensitivity


RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
 APPR BY ZHAN

Omni-direction mini microphone
 M4015-High Sensitivity Series

THIRD ANGLE PROJECTION



RHTCYM4015P-323