






	1	2	3	4	5	6	7	8	9
A									
B									
C									
D									
E									
F									
G	 NINGBO RHT ELECTRONIC CO.,LTD	UNITS:mm SHEET SIZE: A4 SCALE:---			DRWN BY PAN CHK'D BY FENG APPR BY ZHAN		Omni-direction mini microphone M4522 Serie THIRD ANGLE PROJECTION  RHTCYM4522P-443		
	1	2	3	4	5	6	7	8	9




Unit:mm

Specifications:
Sensitivity(1KHz,0dB=1V/Pa):-40±3dBj-42±3dBj-44±3dB
Directivity:Omni-directional
Impedance:2.2KΩ Max.
Current consumption:0.5mA Max.
Operation voltage:1.0~10V
S/N ratio:60dB Min.
Sensitivity vs. Voltage:3dB Max. at VS=2.0V~1.5V
Std. Test Condition:94dB S.P.L @1KHz VS=2.0V
Frequency:20~16,000Hz

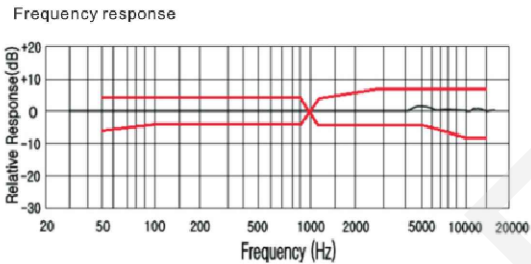

Schematic diagram VS=2V RL=2.2K

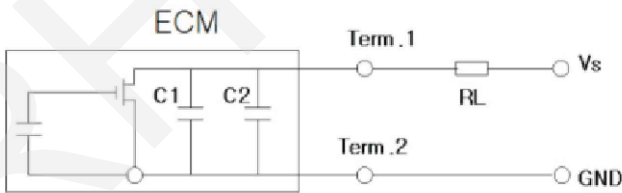

ORDER INFORMATION
Product NO: RHTCYM 4522 P - 443

Omni-Direction mini microphone Series
Dimensions _____
Note: Soldering: P:Pin Type W:Wire type
Sensitivity _____