





Specifications:  
Sensitivity(1KHz,0dB=1V/Pa):-40±3dB;-42±3dB;-44±3dB  
Directivity:Omni-directional  
Impedance:2.2KΩ Max.  
Current consumption:0.5mA Max.  
Operation voltage:1.0~10V  
S/N ratio:60dB Min.  
Sensitivity vs. Voltage:3dB Max. at VS=2.0V~1.5V  
Std. Test Condition:94dB S.P.L @1KHz VS=2.0V  
Frequency:20~16,000Hz

Unit:mm

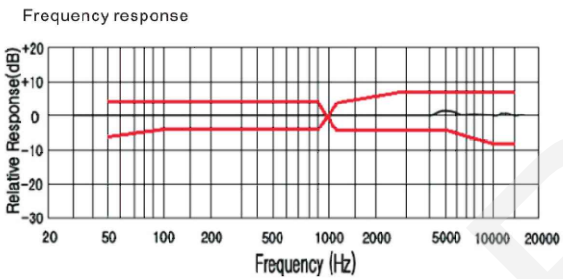

Schematic diagram VS=2V RL=2.2K

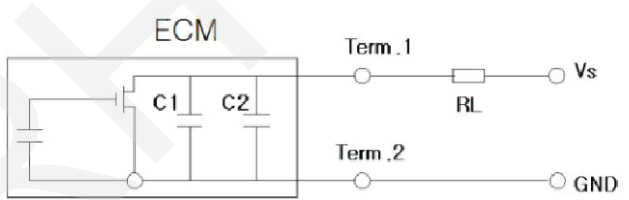

ORDER INFORMATION

Product NO: RHTCYM 6015P P - 443

Omni-Direction mini microphone Series  
Dimensions  
Note: Soldering: PiPin Type W:Wire type  
Sensitivity

|          |                |              |
|----------|----------------|--------------|
| UNITS:mm | SHEET SIZE: A4 | SCALE:---    |
| 0~3      | 3~18           | 18~50        |
| 50~120   | CHK'D BY FENG  | APPR BY ZHAN |
| ±0.12    | ±0.15          | ±0.3         |
| ±0.5     |                |              |

|                        |                                             |
|------------------------|---------------------------------------------|
| DRWN BY PAN            | Omni-direction mini microphone M6015P Serie |
| THIRD ANGLE PROJECTION | RHTCYM6015PP-443                            |