








Unit:mm

Specifications:
Sensitivity(1KHz,0dB=1V/Pa):-40±3dB;-42±3dB;-44±3dB
Directivity:Omnidirectional
Impedance:2.2KΩ Max.
Current consumption:0.5mA Max.
Operation voltage:1.0~10V
S/N ratio:60dB Min.
Sensitivity vs. Voltage:3dB Max. at VS=2.0V~1.5V
Std. Test Condition:94dB S.P.L @1KHz VS=2.0V
Frequency:20~16,000Hz

Frequency response

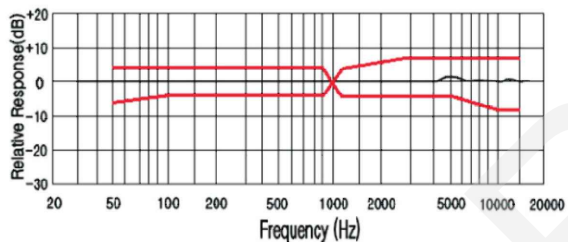

Schematic diagram VS=2V RL=2.2K

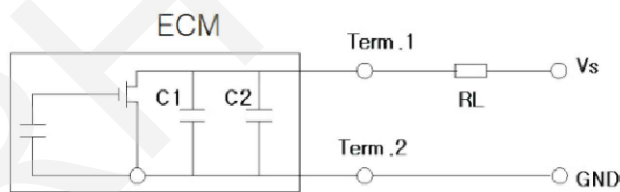

ORDER INFORMATION

Product NO.: RHTCYM 6018P P - 443

Omn-Direction mini microphone Series

Dimensions

Note: Soldering: PiPin Type W:Wire type

Sensitivity




NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

Omn-direction mini microphone M6018P Serie

THIRD ANGLE PROJECTION



RHTCYM6018PP-443