





	1	2	3	4	5	6	7	8	9
A									
B									
C									
D									
E									
F									
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4 SCALE: ---	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	Omni-direction mini microphone M6022 Serie THIRD ANGLE PROJECTION 		
	1	2	3	4	5	6	7	8	9

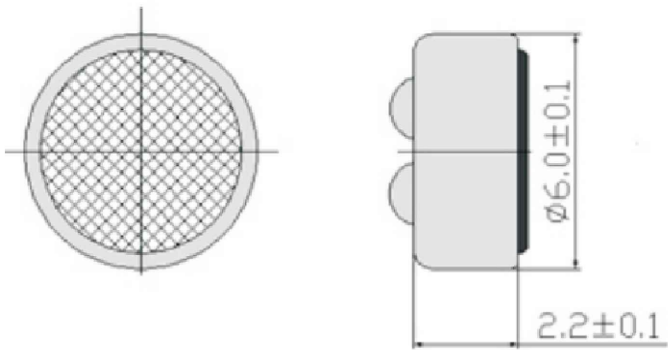


Unit:mm

Specifications:
 Sensitivity(1KHz,0dB=1V/Pa):-40±3dB;-42±3dB;-44±3dB
 Directivity:Omni-directional
 Impedance:2.2KΩ Max.
 Current consumption:0.5mA Max.
 Operation voltage:1.0~10V
 S/N ratio:60dB Min.
 Sensitivity vs. Voltage:3dB Max. at VS=2.0V~1.5V
 Std. Test Condition:94dB S.P.L @1KHz VS=2.0V
 Frequency:20~16,000Hz

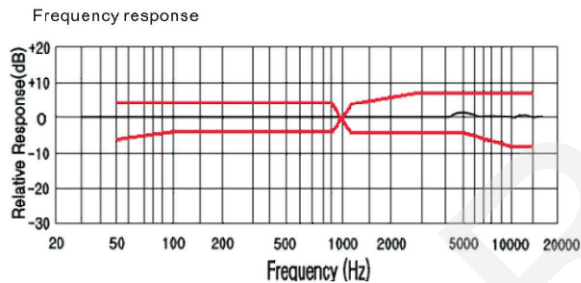

Schematic diagram VS=2V RL=2.2K

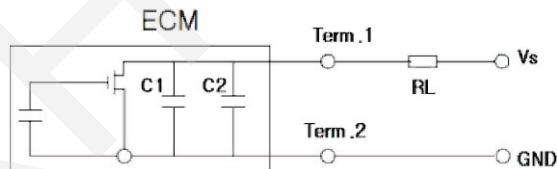

ORDER INFORMATION

Product NO: RHTCYM 6022 P - 443

Omni-Direction mini microphone Series

Dimensions

Note: Soldering: PiPin Type W/Wire type

Sensitivity