

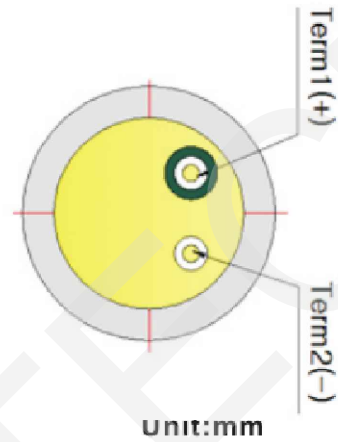




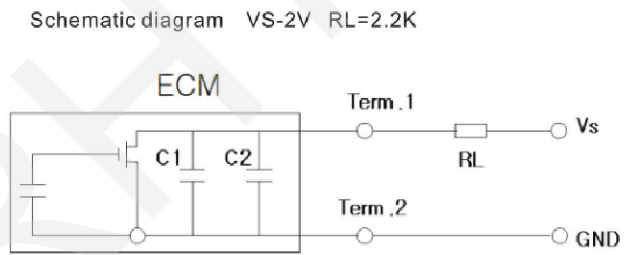

Specifications:
Sensitivity: 1KHz, 0dB=1V/Pa:
-36±3dB; -38±3dB; -40±3dB; -42±3dB; -44±3dB
Directivity: Omnidirectional
Impedance: 2.2KΩ Max.
Current consumption: 0.5mA Max.
Operation voltage: 1.0~10V
S/N ratio: 60dB Min.
Sensitivity vs. Voltage: 3dB Max. at VS=2.0V~1.5V
Std. Test Condition: 94dB S.P.L @1KHz VS=2.0V
Frequency: 20~16,000Hz

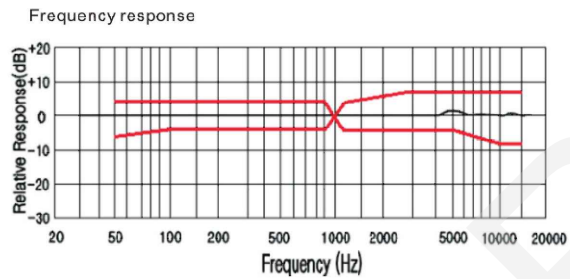

ORDER INFORMATION
Product NO.: RHTCYM 6035AP P - 443

Omni-Direction mini microphone Series

Dimensions

Note: Soldering: PiPin Type W: Wire type

Sensitivity



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	Omni-direction mini microphone M6035AP Serie	
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

RHTCYM6035APP-443