
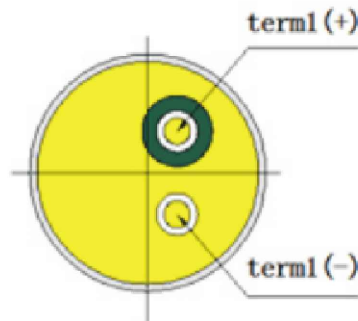
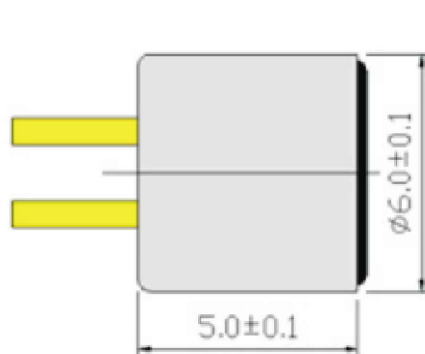




Specifications:

Sensitivity: 1KHz, 0dB=1V/Pa

-34±3dB, -36±3dB, -38±3dB, -40±3dB, -42±3dB, -44±3dB

Directivity: Omnidirectional

Impedance: 2.2KΩ Max.

Current consumption: 0.5mA Max.

Operation voltage: 1.0~10V

S/N ratio: 60dB Min.


Sensitivity vs. Voltage: 3dB Max. at VS=2.0V~1.5V

Std. Test Condition: 94dB S.P.L @1KHz VS=2.0V


Frequency: 20~16,000Hz

Unit:mm

Frequency response

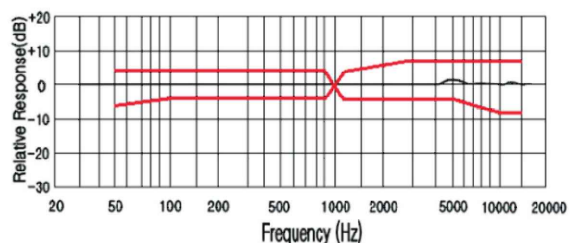

Schematic diagram VS=2V RL=2.2K

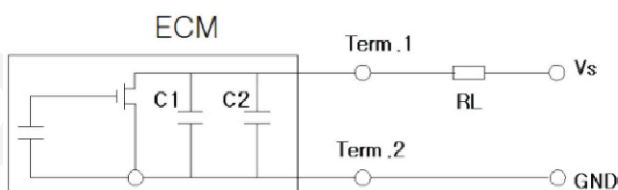

ORDER INFORMATION

Product NO.: RHTCYM 6050AP P - 443

Omnidirection mini microphone Series

Dimensions

Note: Soldering: Pin Type Wire type

Sensitivity



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Omnidirection mini microphone M6050AP Serie

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTCYM6050APP-443