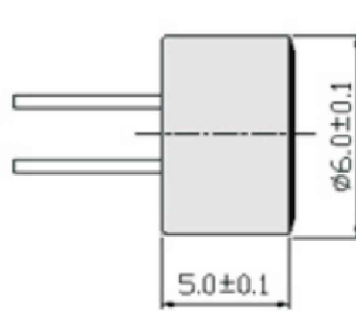



Unit:mm

Specifications:

Sensitivity: 1KHz, 0dB=1V/Pa;

-34±3dB; -36±3dB; -38±3dB; -40±3dB; -42±3dB; -44±3dB

Directivity: Omnidirectional

Impedance: 2.2KΩ Max.

Current consumption: 0.5mA Max.

Operation voltage: 1.0~10V


S/N ratio: 60dB Min.

Sensitivity vs. Voltage: 3dB Max. at VS=2.0V~1.5V


Std. Test Condition: 94dB S.P.L @1KHz VS=2.0V

Frequency: 20~16,000Hz

Frequency response

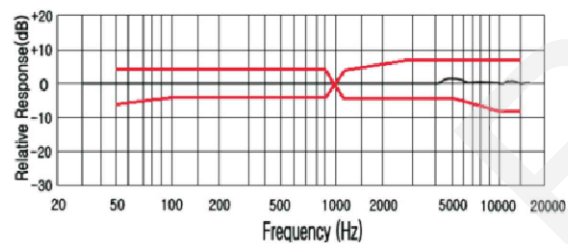

Schematic diagram VS=2V RL=2.2K

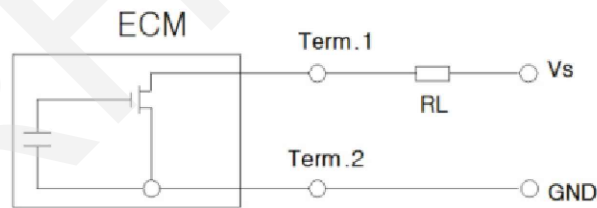

ORDER INFORMATION

Product NO.: RHTCYM 6050P P - 443

Omni-Direction mini microphone Series

Dimensions

Note: Soldering: PiPin Type W/Wire type

Sensitivity



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Omni-direction mini microphone M6050P Series

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTCYM6050PP-443

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN