








Specifications:
Sensitivity(1KHz,0dB=1V/Pa):-47±3dB
Directivity:Unidirectional
Impedance:2.2K Ω Max.
Current consumption:0.5mA Max.
Operation voltage:1.0~10V
S/N ratio:60dB Min.
Sensitivity vs. Voltage:3dB Max. at VS=2.0V~1.5V
Std. Test Condition:94dB S.P.L @1KHz VS=2.0V
Frequency:20~16,000Hz

Frequency response

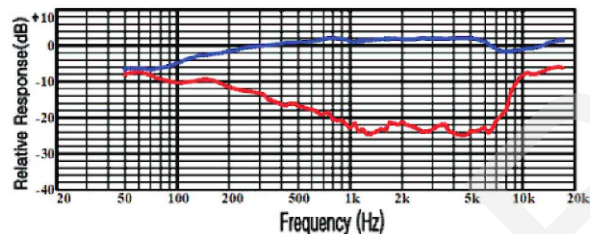

Schematic diagram VS=1.5V RL=680 Ω

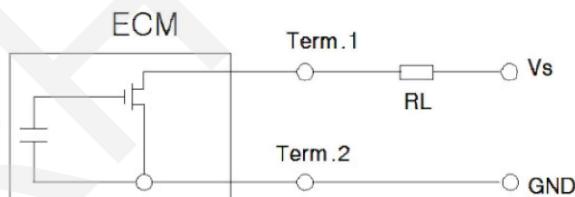

ORDER INFORMATION

Product NO: RHTCYU 6027 P - 473

Omni-Direction mini microphone Series

Dimensions

Note: Soldering: P:Pin Type W:Wire type

Sensitivity

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Unidirectional mini microphone U6027 Serie

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTCYU-6027P-473