


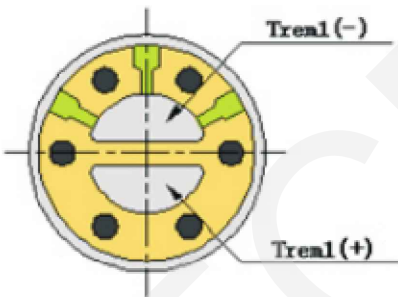



	1	2	3	4	5	6	7	8	9
A									
B									
C									
D									
E									
F									
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4 SCALE: ---	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	Unidirectional mini microphone U9750 Serie THIRD ANGLE PROJECTION  RHTCYU-9750P-473		
	1	2	3	4	5	6	7	8	9




Unit:mm

Specifications:
Sensitivity(1KHz,0dB=1V/Pa):-47±3dB
Directivity:Unidirectional
Impedance:2.2KΩ Max.
Current consumption:0.5mA Max.
Operation voltage:1.0~10V
S/N ratio:60dB Min.
Sensitivity vs. Voltage:3dB Max. at VS=2.0V~1.5V
Std. Test Condition:94dB S.P.L @1KHz VS=2.0V
Frequency:20~16,000Hz

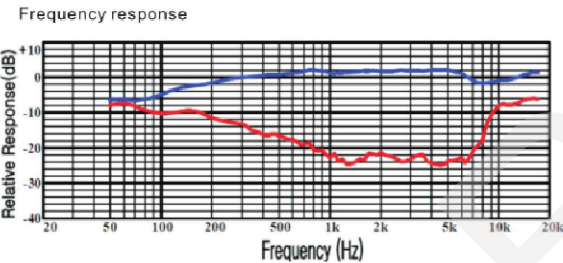

Schematic diagram VS=1.5V RL=680Ω

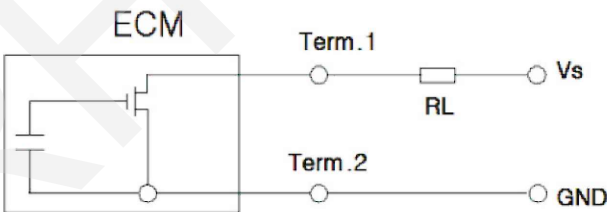

ORDER INFORMATION
Product NO: RHTCYU 9750 P - 473
Omni-Direction mini microphone Series
Dimensions
Note: Soldering: P:Pin Type W:Wire type
Sensitivity