








Unit:mm

Specifications:
Sensitivity(1KHz,0dB=1V/Pa):
-34±3dB;-36±3dB;-38±3dB;-40±3dB;-42±3dB;-44±3dB
Directivity:Omni-directional
Impedance:2.2KΩ Max.
Current consumption:0.5mA Max.
Operation voltage:1.0~10V
S/N ratio:60dB Min.
Sensitivity vs. Voltage:3dB Max. at VS=2.0V~1.5V
Std. Test Condition:94dB S.P.L @1KHz VS=2.0V
Frequency:20~16,000Hz

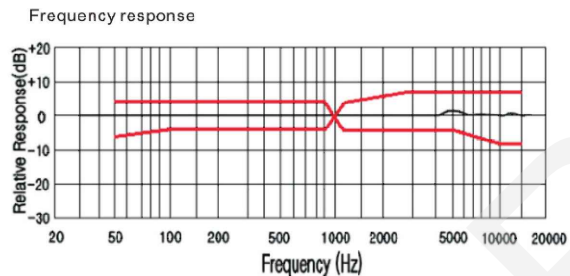

Schematic diagram VS=2V RL=2.2K

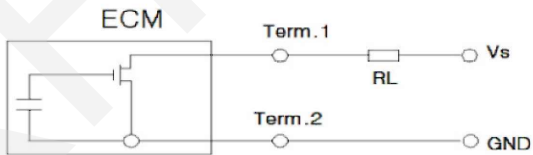

ORDER INFORMATION

Product NO.: RHTCYM 9745P P - 443

Omni-Direction mini microphone Series
Dimensions
Note: Soldering: PiPin Type W:Wire type
Sensitivity

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG			
APPR BY ZHAN			

Omni-direction mini microphone M9745P Serie	
THIRD ANGLE PROJECTION	RHTCYM9745PP-443