


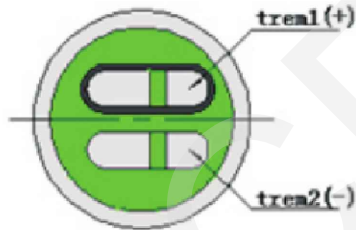



	1	2	3	4	5	6	7	8	9
A									A
B									B
C									C
D									D
E									E
F									F
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4 SCALE: ---	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	Omni-direction mini microphone M9765A Series THIRD ANGLE PROJECTION  RHTCYM9765AP-443		
	1	2	3	4	5	6	7	8	9




Unit:mm

Specifications:
Sensitivity(1KHz,0dB=1V/Pa):
-32±3dB;-34±3dB;-36±3dB;
-38±3dB;-40±3dB;-42±3dB;-44±3dB
Directivity:Omni-directional
Impedance:2.2KΩ Max.
Current consumption:0.5mA Max.
Operation voltage:1.0~10V
S/N ratio:60dB Min.
Sensitivity vs. Voltage:3dB Max. at VS=2.0V~1.5V
Std. Test Condition:94dB S.P.L @1KHz VS=2.0V
Frequency:20~16,000Hz

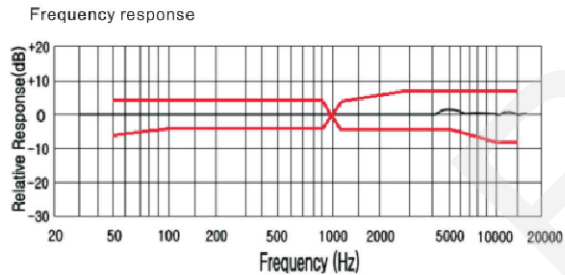

Schematic diagram VS=2V RL=2.2K

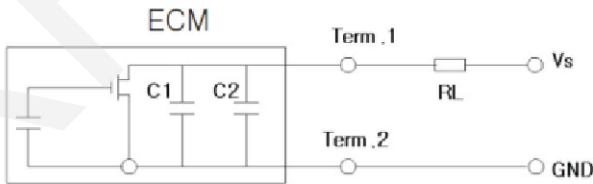

ORDER INFORMATION
Product NO.: RHTCYM 9765A P - 443

Omni-Direction mini microphone Series
Dimensions
Note: Soldering: P.Pin Type W/Wire type
Sensitivity