

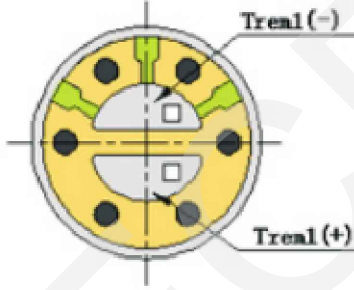




	1	2	3	4	5	6	7	8	9
A									
B									
C									
D									
E									
F									
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4 SCALE: --- APPR BY ZHAN	DRWN BY PAN CHK'D BY FENG	Noise Cancelling mini microphone N6050 Serie THIRD ANGLE PROJECTION 		
	1	2	3	4	5	6	7	8	9




Unit:mm

Specifications:
Sensitivity(1KHz,0dB=1V/Pa):
-36±3dB;-38±3dB;-40±3dB; -42±3dB; -44±3dB
Directivity:Noise Cancelling
Impedance:2.2KΩ Max.
Current consumption:0.5mA Max.
Operation voltage:1.0~10V
S/N ratio:60dB Min.
Sensitivity vs. Voltage:3dB Max. at VS=2.0V~1.5V
Std. Test Condition:94dB S.P.L @1KHz VS=2.0V
Frequency:20~16,000Hz

Frequency response

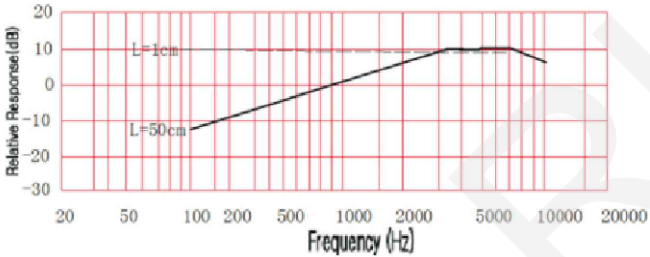

Schematic diagram VS=2V RL=2.2KΩ

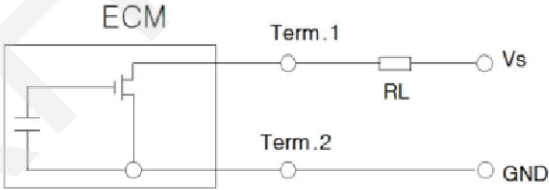

ORDER INFORMATION

Product NO: RHTCYN 6050 P - 423

Noise Cancelling mini microphone Serie

Dimensions

Note: Soldering: P:Pin Type W:Wire type

Sensitivity