



Specification For Approval

Customer Name : _____

RHT P/N: _____ RHTCYT-09x5.5

Description : _____

Date : _____ 2026-7-16

Approved by
Sign : date :
Please return by one copy

Design: _____ Pan _____ Checked: _____ Andy _____ Approved: _____ Feng _____



Address:Maoshan Industrial Park, Huajiafen Village, Jiangshan Town,
Yinzhou District Ningbo City, Zhejiang,POSTAL:315193
Tel:086-574-56176016 M:0086-15168501684
E-mail:info@rhatecp.com Web:www.rhatecp.com www.rhtconn.com

1. Externally driven magnetic buzzers Electrical Specification:

Item		Unit	Specifications
1-1	Rated Voltage (Square Wave)	V	3
1-2	Operating Voltage	V	4-6
1-3	* Rated Current (Max)	mA	80
1-4	* Min Sound Output at 10cm	dB	82
1-5	* Resonant Frequency	Hz	2731
1-6	Coil Resistance	Ω	40 $\pm$ 4
1-7	Operating Temperature	$^{\circ}\text{C}$	-40~+85
1-8	Storage Temperature	$^{\circ}\text{C}$	-40~+105
1-9	Weight	g	1.0
1-10	Housing Material		PPO
1-11	Lead Pin Material		Red Copper (DSn)

* Value Applying at Rated Voltage (resonant frequency, 1/2 duty, square wave)

2. ENVIRONMENTAL TEST

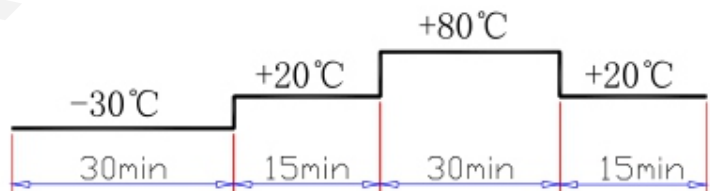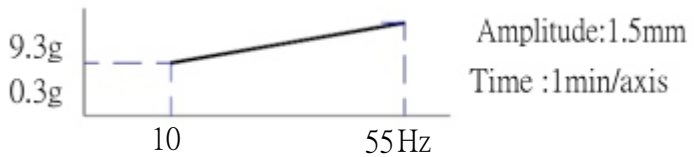Item		Specifications
2-1	Storage in High temp.	Storage in +85 $^{\circ}\text{C}\pm 2^{\circ}\text{C}$ test box for 96 hours, then expose to the room temperature for 2 hours without applying power.
2-2	Storage in Low temp.	Storage in -40 $^{\circ}\text{C}\pm 2^{\circ}\text{C}$ test box for 96 hours, then expose to the room temperature for 2 hours without applying power.
2-3	Storage in Humidity	Storage in +40 $^{\circ}\text{C}\pm 2^{\circ}\text{C}$ 90-95%RH test box for 96 hours, then expose to the room temperature for 2 hours without applying power.
2-4	Thermal cycle test.	 Make this test for 5 cycles without applying power, then expose to the room temperature for 2 hours.
2-5	Vibration test	 Make this test for the directions of X,Y, Z for 2 hours each (total 6 hours).
2-6	Drop test	Free drop a unit from the height 100cm to the surface of 10mm thick board ,three directions(X,Y,Z).
2-7	Solderability test	Soldering temp.:260 $\pm 5^{\circ}\text{C}$ Heat applying time:3 ± 0.5 sec.

PASS CRITERION :

After these tests , the change of S.P.L shall be within ± 5 dB .

3. MEASURING METHOD(BUZZER MODE)

3-1 .Test Condition

3-1-1.STANDARD

Relative Temperature : $25 \pm 3^{\circ}\text{C}$

humidity : 60% ~ 70%,

Atmospheric pressure : 860mbar to 1060mbar

3-1-2 JUDGEMENT

Temperature : $15 \sim 35^{\circ}\text{C}$

Relative humidity : 45% ~ 85%,


Atmospheric pressure : 860mbar to 1060mbar.

3-2 . Standard Test Fixture


1.rated Voltage(Square wave):5V

2.Resonant Frequency:2731Hz

3.Standard Drive Circuit:

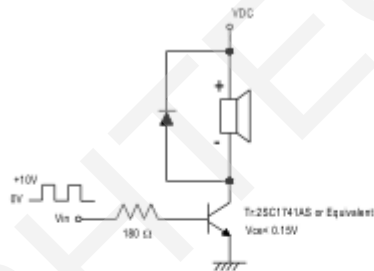


4. Standard test fixture:

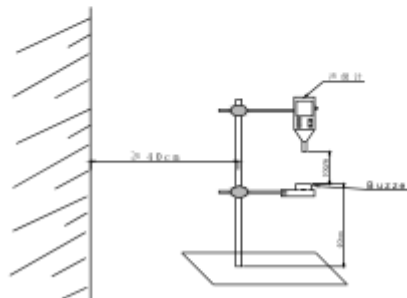

4.DIMENSIONS

Unless otherwise specified,tolerance: ± 0.5 (unit:mm)

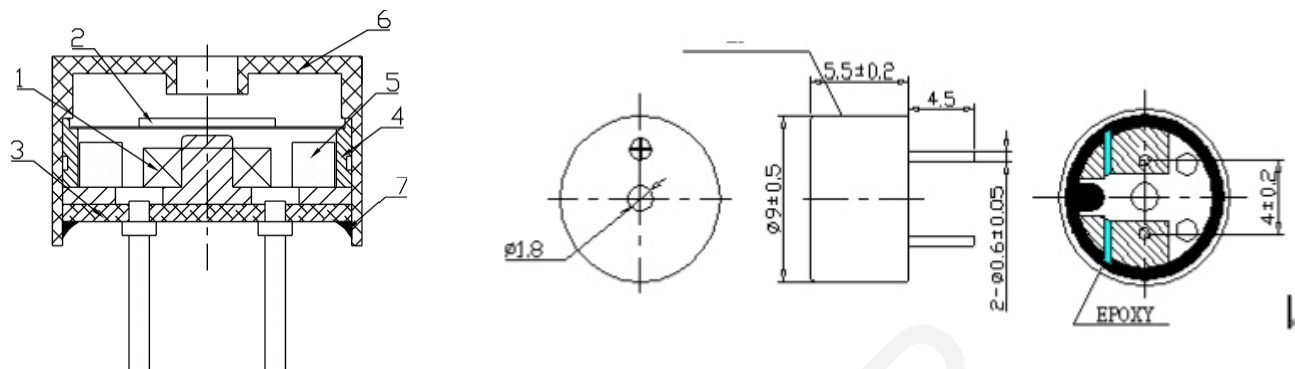

Cadmium(Cd)/Cndmium Compounds	$\leq 100\text{ppm}$
Lead (Pb) / Lead Compounds	$\leq 800\text{ppm}$
Mercury (Hg) Merrcury Compounds	$\leq 800\text{ppm}$
Hexavalent-Chromium (Cr6+) Compounds	$\leq 800\text{ppm}$
PBB	$\leq 800\text{ppm}$
PBDE	$\leq 800\text{ppm}$

- 1) All parts must be meet to ROHS.
- 2) Wave solder allowed and wash not allowed.

Part No.	Part Name	Q' TY	Material	Remark
7	Potting		Epoxy	
6	Housing	1	PPO	
5	Core	1	Ferrite	
4	Brass ring	1	Copper	
3	PCB	1	Epoxy	
2	Diaphragm	1	Iron	
1	Coil Part	1	Copper And Iron	

5. PACKING

