



Specification For Approval

Customer Name : _____

RHT P/N: _____ RHTCYT-12x8.5

Description : _____

Date : _____ 2026-7-16

Approved by
Sign : date :
Please return by one copy

Design: _____ Pan _____ Checked: _____ Andy _____ Approved: _____ Feng _____

Address:Maoshan Industrial Park, Huajiafen Village, Jiangshan Town,

Yinzhou District Ningbo City, Zhejiang,POSTAL:315193

Tel:086-574-56176016 M:0086-15168501684

E-mail:info@rhitecp.com Web:www.rhitecp.com www.rhtconn.com



1. Externally driven magnetic buzzers Electrical Specification:

Item		Unit	Specifications
1-1	Rated Voltage (Square Wave)	Vo-p	1.5
1-2	Operating Voltage	Vo-p	1~3
1-3	* Rated Current (Max)	mA	30
1-4	* Min Sound Output at 10cm	dB	85
1-5	* Resonant Frequency	Hz	2048
1-6	Coil Resistance	Ω	16 $\pm$ 4.5
1-7	Operating Temperature	$^{\circ}\text{C}$	-30~+70
1-8	Storage Temperature	$^{\circ}\text{C}$	-40~+85
1-9	Weight	g	2
1-10	Housing Material		PPO

* Value Applying at Rated Voltage (resonant frequency, 1/2 duty, square wave)

2. ENVIRONMENTAL TEST

Item		Specifications
2-1	Storage in High temp.	Storage in +85 $^{\circ}\text{C}\pm 2^{\circ}\text{C}$ test box for 96 hours, then expose to the room temperature for 2 hours without applying power.
2-2	Storage in Low temp.	Storage in -40 $^{\circ}\text{C}\pm 2^{\circ}\text{C}$ test box for 96 hours, then expose to the room temperature for 2 hours without applying power.
2-3	Storage in Humidity	Storage in +40 $^{\circ}\text{C}\pm 2^{\circ}\text{C}$ 90-95%RH test box for 96 hours, then expose to the room temperature for 2 hours without applying power.
2-4	Thermal cycle test.	Make this test for 5 cycles without applying power, then expose to the room temperature for 2 hours.
2-5	Vibration test	Amplitude: 1.5mm Time : 1min/axis Make this test for the directions of X,Y, Z for 2 hours each (total 6 hours).
2-6	Drop test	Free drop a unit from the height 100cm to the surface of 10mm thick board ,three directions(X,Y,Z).
2-7	Solderability test	Soldering temp.: 260 $\pm$ 5 $^{\circ}\text{C}$ Heat applying time: 3 $\pm$ 0.5sec.

PASS CRITERION :

After these tests , the change of S.P.L shall be within ± 5 dB .

3. MEASURING METHOD(BUZZER MODE)

3-1 .Test Condition

3-1-1.STANDARD

Temperature : $25 \pm 3^{\circ}\text{C}$ Relative

humidity : 60% ~ 70%,

Atmospheric pressure : 860mbar to 1060mbar

3-1-2.JUDGEMENT

Temperature : $15 \sim 35^{\circ}\text{C}$

Relative humidity : 45% ~ 85%,


Atmospheric pressure : 860mbar to 1060mbar.

3-2 . Standard Test Fixture


1.rated Voltage(Square wave):1.5V

2.Resonant Frequency:2048Hz

3.Standard Drive Circuit:

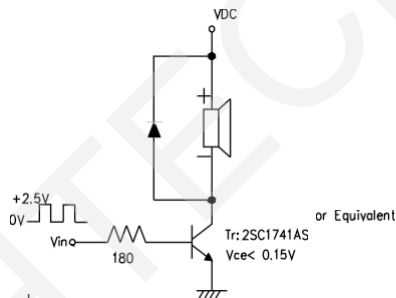


4. Standard test fixture:

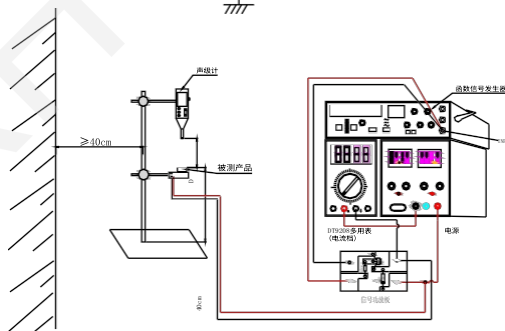

4.DIMENSIONS

Unless otherwise specified,tolerance: ± 0.5 (unit:mm)

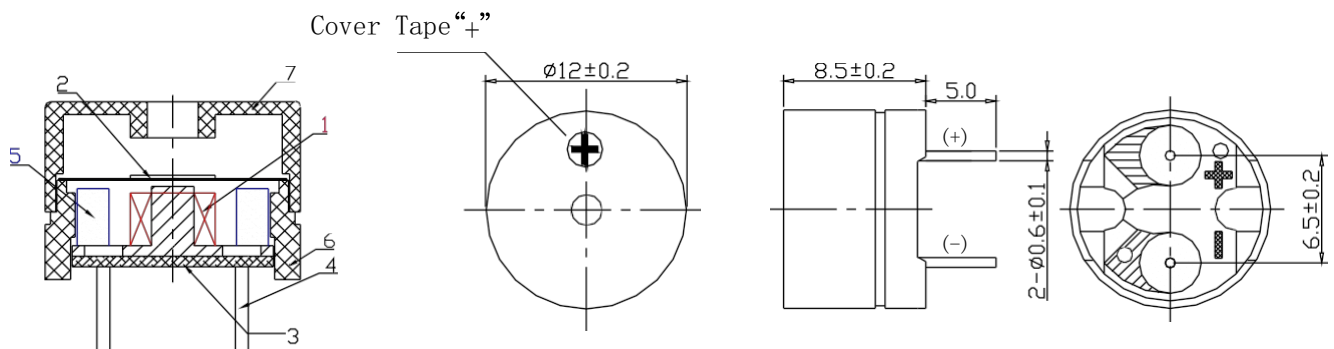

Cadmium(Cd)/Cndmium Compounds	≤100ppm
Lead (Pb) / Lead Compounds	≤800ppm
Mercury (Hg) Merrcury Compounds	≤800ppm
Hexavalent-Chromium (Cr6+) Compounds	≤800ppm
PBB	≤800ppm
PBDE	≤800ppm

1) All parts must be meet to ROHS.

Part No.	Part Name	Q' TY	Material	Remark
7	Housing	1	Noryl	
6	Housing	1	Noryl	
5	Magent	1	Ferrite	
4	PIN	2	Red Copper	
3	PCB	1	Exopy	
2	Diaphragm	1	Iron	
1	Coil Part	1	Copper And Iron	

5. PACKING

