



Frequency Response:

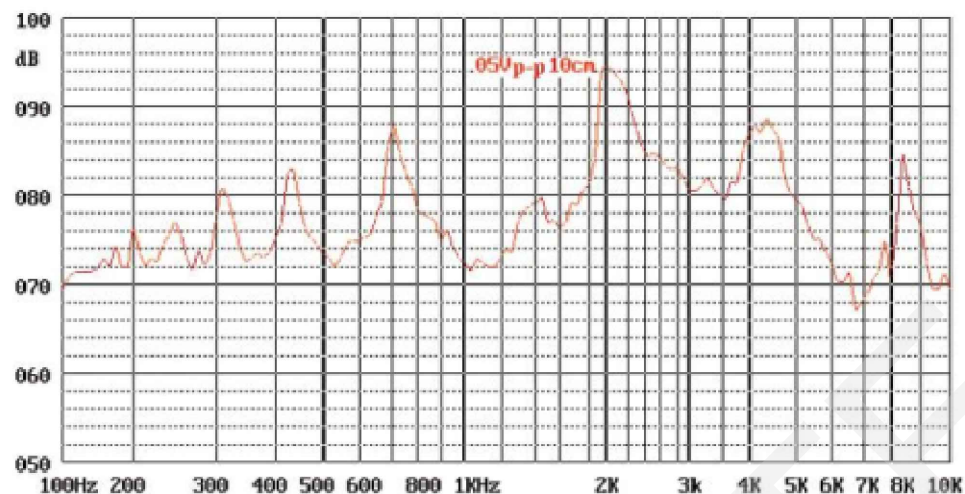

Dimensions (Unit: mm)

Tolerance: $\pm 0.5\text{mm}$ Except Specified

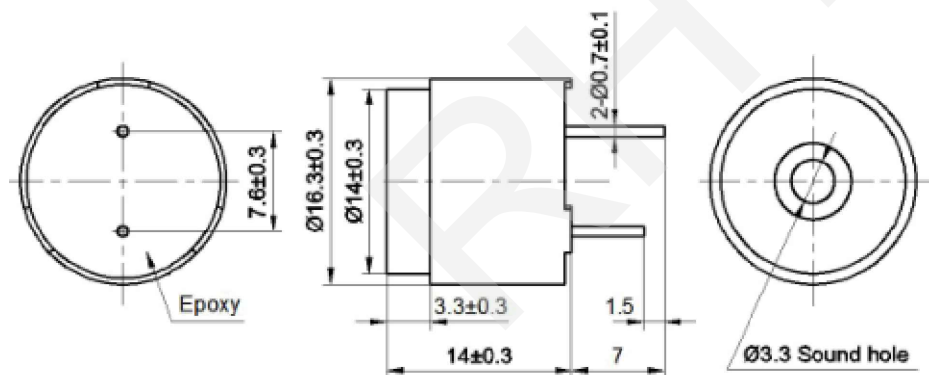

Specification:

Rated Voltage (Vo-p):5

Operating Voltage (Vo-p):3~7

*Rated Current (mA): ≤ 40

Coil Resistance (Ω): 45 ± 6

*Sound Output at 10cm (dB): ≥ 90

Resonance Frequency (Hz):2048

Operating Temperature (°C):-40~+85

Storage Temperature (°C):-40~+90

Weight (g):4.9

Housing Material:PBT

RoHS:Yes

*Applying rated voltage and resonant frequency

(1/2 duty square wave);

Test basic state: Temp($20\pm 2^\circ\text{C}$),Humidity(40~70%RH),

Air pressure(860~1060hPa).

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Externally driven magnetic buzzers,Top sound

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



RHTCYT-16x14