



Frequency Response:

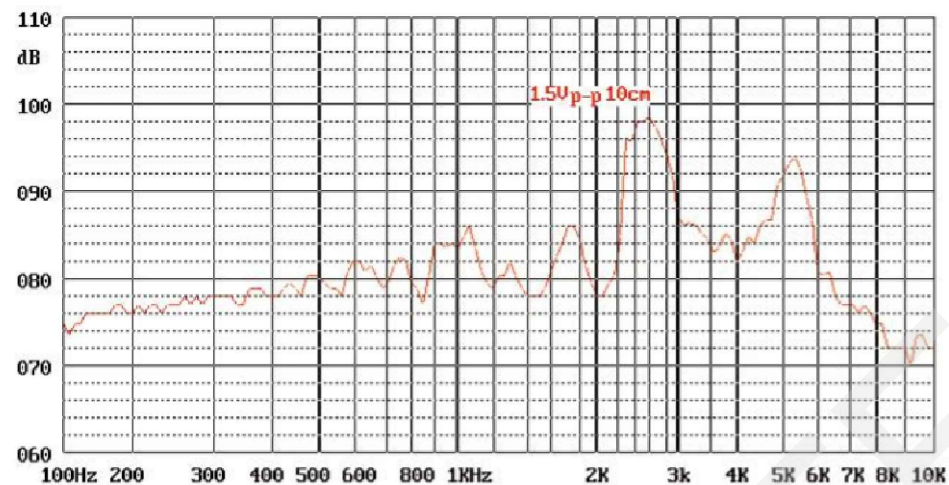

Dimensions (Unit: mm)

Tolerance: $\pm 0.5\text{mm}$ Except Specified

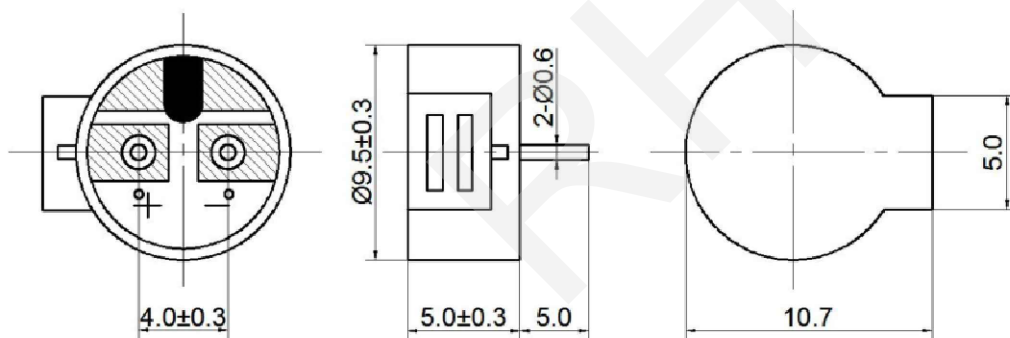

Specification:

Rated Voltage (V_{o-p}): 1.5

Operating Voltage (V_{o-p}): 1~2

*Rated Current (mA): ≤ 100

Coil Resistance (Ω): 5.5 ± 1

*Sound Output at 10cm (dB): ≥ 90

Resonance Frequency (Hz): 2731

Operating Temperature (°C): -40~+85

Storage Temperature (°C): -40~+90

Weight (g): 0.6

Housing Material: PPD

RoHS: Yes

*Applying rated voltage and resonant frequency

(1/2 duty square wave);

Test basic state: Temp($20 \pm 2^\circ\text{C}$), Humidity(40~70%RH),

Air pressure(860~1060hPa).

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Externally driven magnetic buzzers,Side sound

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



RHTCYT-9.6x05