



Specification For Approval

Customer Name : _____

RHT P/N: RHTCYPB-45x26

Description : _____

Date : 2026-7-22

Approved by
Sign : date :
Please return by one copy

Design: Pan Checked: Andy Approved: Feng


Address:Maoshan Industrial Park, Huajiafen Village, Jiangshan Town,

Yinzhou District Ningbo City, Zhejiang,POSTAL:315193

Tel:086-574-56176016 M:0086-15168501684


E-mail:info@rhtecp.com Web:www.rhtecp.com www.rhtconn.com

SPL& Current Consumption vs. Input Voltage:

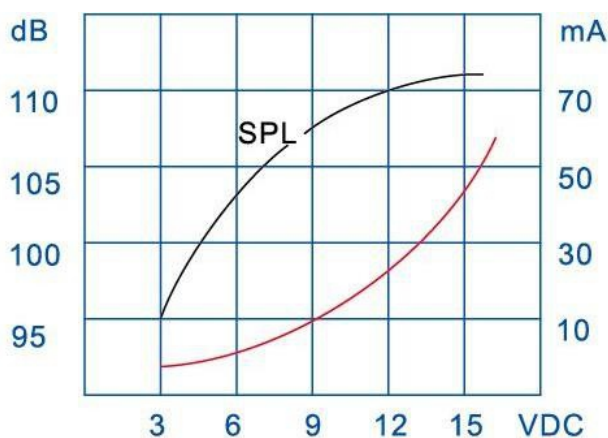

Dimensions (Unit: mm)

Tolerance: ± 0.5 mm Except Specified

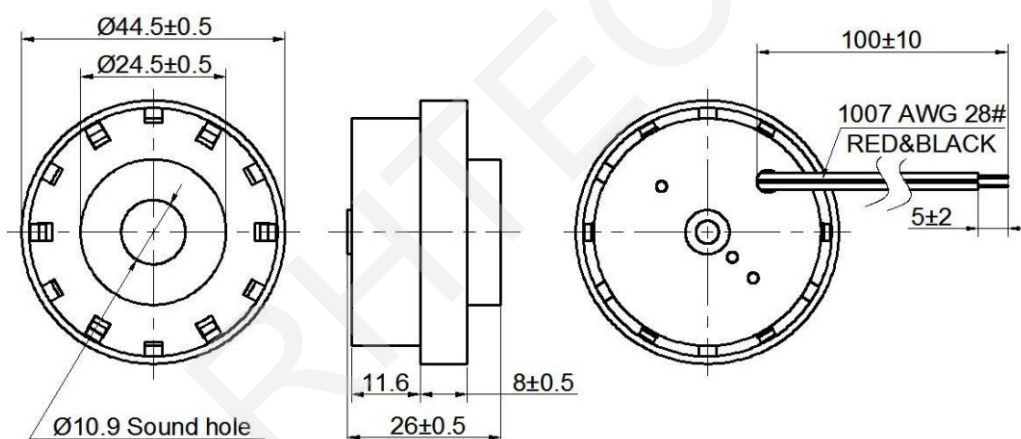

Specification

Rated Voltage	(VDC)	12
Operating Voltage	(VDC)	3~20
*Rated Current	(mA)	≤ 35
*Sound Output at 30cm	(dB)	≥ 100
*Resonance Frequency	(KHz)	2.9 ± 0.5
Tone		Continuous
Operating Temperature	($^{\circ}\text{C}$)	$-20 \sim +70$
Storage Temperature	($^{\circ}\text{C}$)	$-30 \sim +80$
Weight	(g)	17.5
Housing Material		ABS
RoHS		Yes

Remark: The special requirements in the test for no anti reverse connection.

*Value applying at rated voltage.

Test basic state: Temp($20 \pm 2^{\circ}\text{C}$), Humidity(40~70%RH), Air pressure(860~1060hPa).