
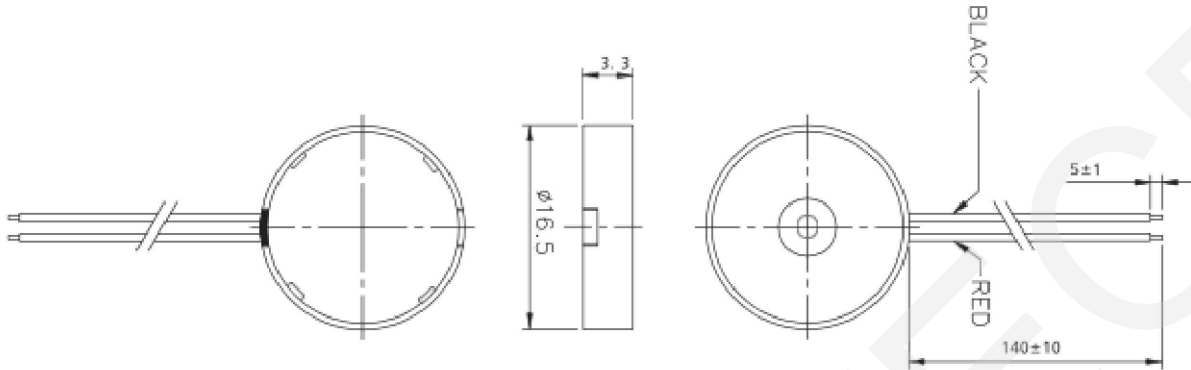
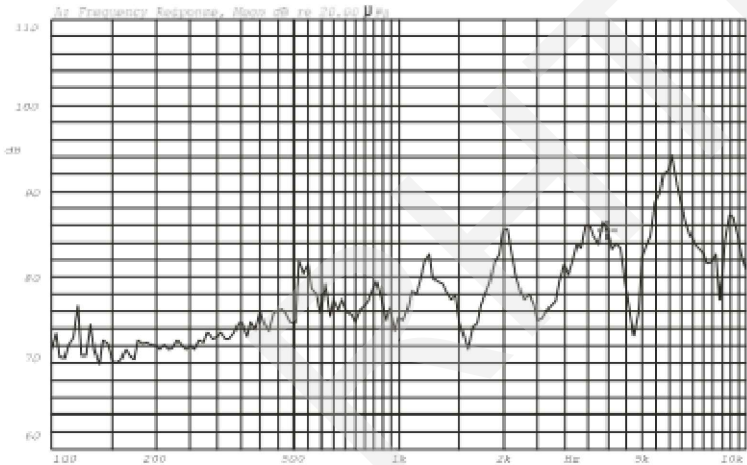

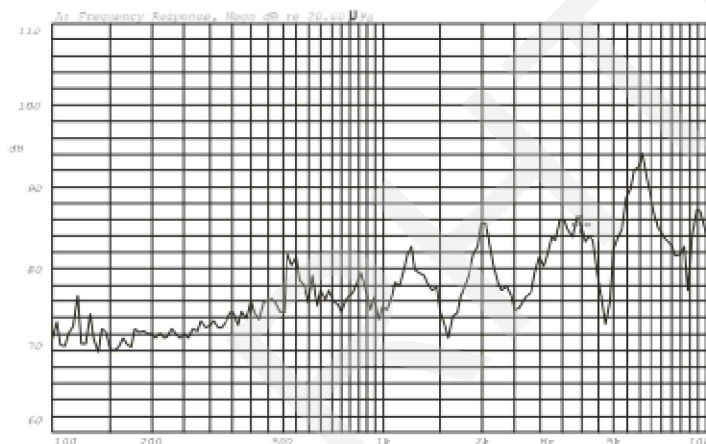


	1	2	3	4	5	6	7	8	9
A									
B									
C	Dimensions (Unit:mm)   Rated Voltage: 9Vp-p Operating Voltage: 3~30Vp-p Max. Rated Current: 1.5mA Resonant Frequency: 4±0.5KHz Min. S.P.L. (@10cm): 72dB Capacitance at 1,000Hz: 9500±30% pF Operating Temperature: -20°C~+70°C Weight: 1.2g ORDER INFORMATION Product NO.: RHTCYPT-17x04-A Without Circuit Piezo Transducer Buzzer Series Order Code								
D									
E									
F									
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SCALE:--- 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	Without Circuit Piezo Transducer Buzzer Series THIRD ANGLE PROJECTION 	
	1	2	3	4	5	6	7	8	9

Dimensions (Unit:mm)

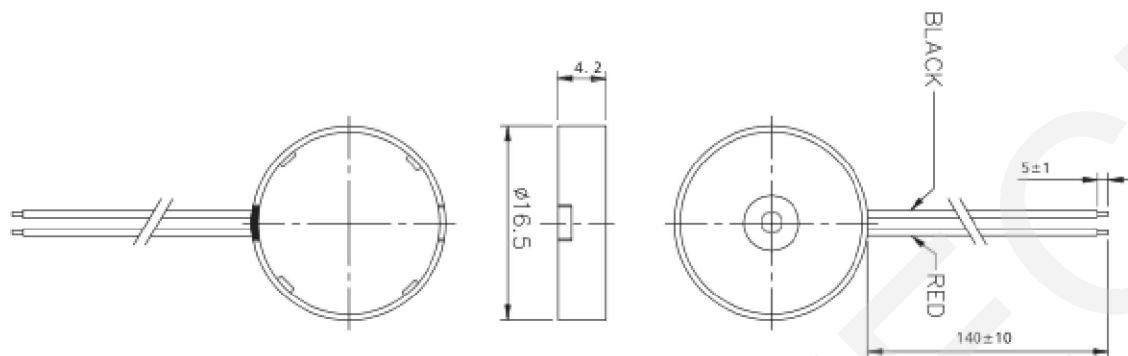

Rated Voltage: 9Vp-p

Operating Voltage: 3~30Vp-p

Max. Rated Current: 1.5mA

Resonant Frequency: 4±0.5KHz

Min. S.P.L. (@10cm): 80dB

Capacitance at 1,000Hz: 14000±30% pF

Operating Temperature: -20°C~+70°C

Weight: 1.2g

ORDER INFORMATION

Product NO.: RHTCYPT-17x04-B

Without Circuit Piezo

Transducer Buzzer Series

Order Code

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Without Circuit Piezo Transducer Buzzer Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTCYPT-17x04-B