



SPL&Current Consumption vs. Input Voltage:

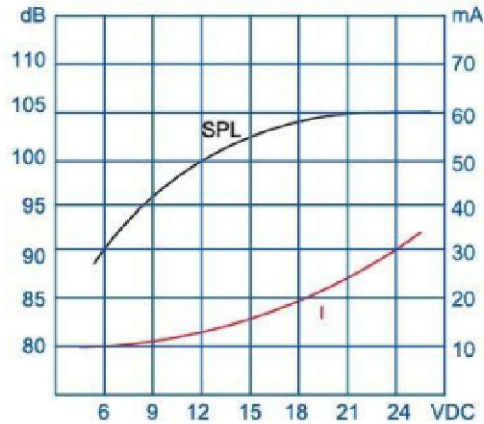

Dimensions (Unit: mm)

Tolerance: $\pm 0.5\text{mm}$ Except Specified

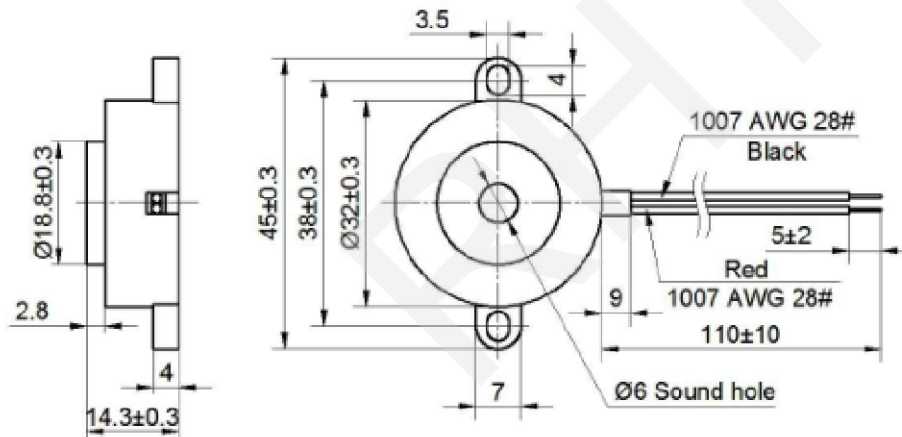

Rated Voltage (VDC):12

Operating Voltage(VDC):3~20

*Rated Current(mA): ≤ 12

*Sound Output at 30cm(dB): ≥ 95

*Resonance Frequency (KHz): 3.9 ± 0.5

Tone

Operating Temperature($^{\circ}\text{C}$): $-20 \sim +70$

Storage Temperature $^{\circ}\text{C}$): $-30 \sim +80$

Weight(g):7.5

Housing Material:ABS

RoHS

Remark: The special requirements in the test for no anti reverse connection.

*Value applying at rated voltage.

Test basic state: Temp($20 \pm 2^{\circ}\text{C}$),

Humidity(40~70%RH),

Air pressure(860~1060hPa).

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

ISO9001&ISO14001&TS16949 Certificate

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTCYPB-32x15

± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN