



Characteristics:
Voltage Rating: 32V DC
Current Rating: 30A~200A
Operating Temperature: -40°C to +125°C

Material:
Body: PC
Contact: Copper Alloy

Order Information:
RHTDY - 274S -N- XXX - A

Plated: N-Nickel plated
Current Rating
Packing: Bag packing

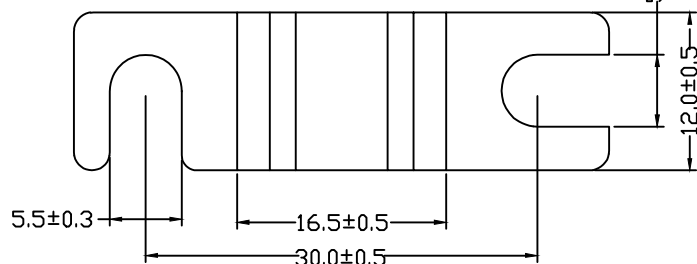

Time-Current Characteristics

% of Rating	Opening Time	
	40~125	150~200
75	---	14400s Min.
100	360000s Min.	---
110	14400s	---
150	90s to 3600s	---
200	5s to 100s	1s to 15s
300	0.5s to 3s	0.3s to 3s
500	0.1s to 1s	0.1s to 1s

Part Number	Current Rating	Housing Color
RHTDY-274S-N-030-A	30A	Orange
RHTDY-274S-N-040-A	40A	Green
RHTDY-274S-N-050-A	50A	Red
RHTDY-274S-N-060-A	60A	Yellow
RHTDY-274S-N-070-A	70A	Brown
RHTDY-274S-N-080-A	80A	Natural
RHTDY-274S-N-100-A	100A	Blue
RHTDY-274S-N-125-A	125A	Pink
RHTDY-274S-N-150-A	150A	Grey
RHTDY-274S-N-200-A	200A	Violet

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

32V MIDI Bolt-Down Fuse



RHTDY-274S-N-XXX-A