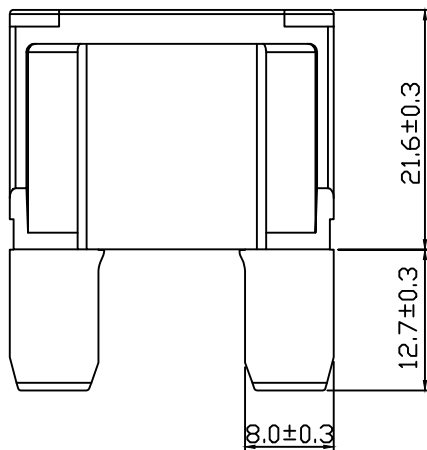
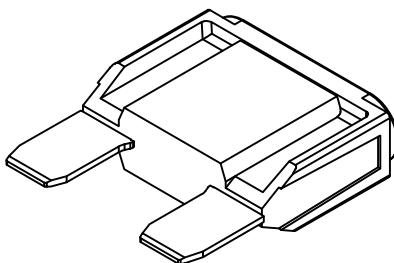
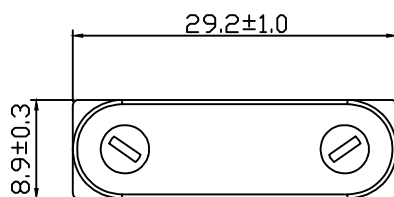


Characteristics:

Voltage Rating: 32V DC

Current Rating: 20A~100A

Operating Temperature:-40°C to+125°C

Material:

Body:PC, UL94-V2

Contact:Zinc Alloy

Time-Current Characteristics

% of Rating	Opening Time
110	>360,000s
135	0.75 to 1800s
200	0.15 to 5s
350	0.04 to 0.5s
600	0.02 to 0.1s

Part Number	Current Rating	Housing Color
RHTDY-193N-020-A	20A	Yellow
RHTDY-193N-025-A	25A	Grey
RHTDY-193N-030-A	30A	Green
RHTDY-193N-035-A	35A	Brown
RHTDY-193N-040-A	40A	Dark Orange
RHTDY-193N-050-A	50A	Red
RHTDY-193N-060-A	60A	Blue
RHTDY-193N-070-A	70A	Tan
RHTDY-193N-080-A	80A	Natural
RHTDY-193N-100-A	100A	Violet

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

32V MAXI Blade Fuse

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTDY-193N-XX-A