



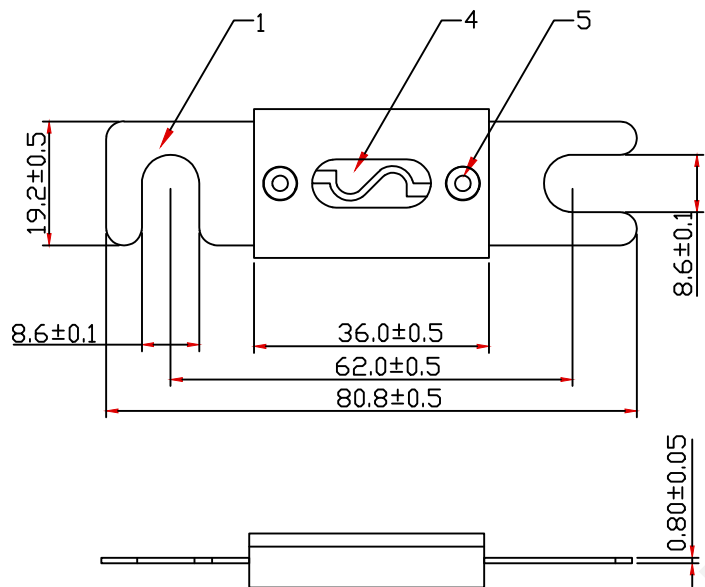

Characteristics:

Voltage Rating: 32V DC

Current Rating: 40A~500A

Operating Temperature: -40°C to +125°C

Material:

Body: Bakelite

Contact: Copper Alloy, Gold Plated

Time-Current Characteristics

% of Rating	Opening Time
150	360s Min.
160	60s
220	60s Max.
250	0.8 to 10s
400	0.25 to 2s

ITEM	Description	QTY
1	Contact	1
2	Base	1
3	Cover	1
4	Transparent cover	1
5	Connector	2

Part Number	Current Rating
RHTDY-274-G-040-A	40A
RHTDY-274-G-050-A	50A
RHTDY-274-G-080-A	80A
RHTDY-274-G-100-A	100A
RHTDY-274-G-150-A	150A
RHTDY-274-G-200-A	200A
RHTDY-274-G-250-A	250A
RHTDY-274-G-300-A	300A
RHTDY-274-G-400-A	400A
RHTDY-274-G-500-A	500A

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

32V Marine Limiter Fuse

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTDY-274-G-XXX-A