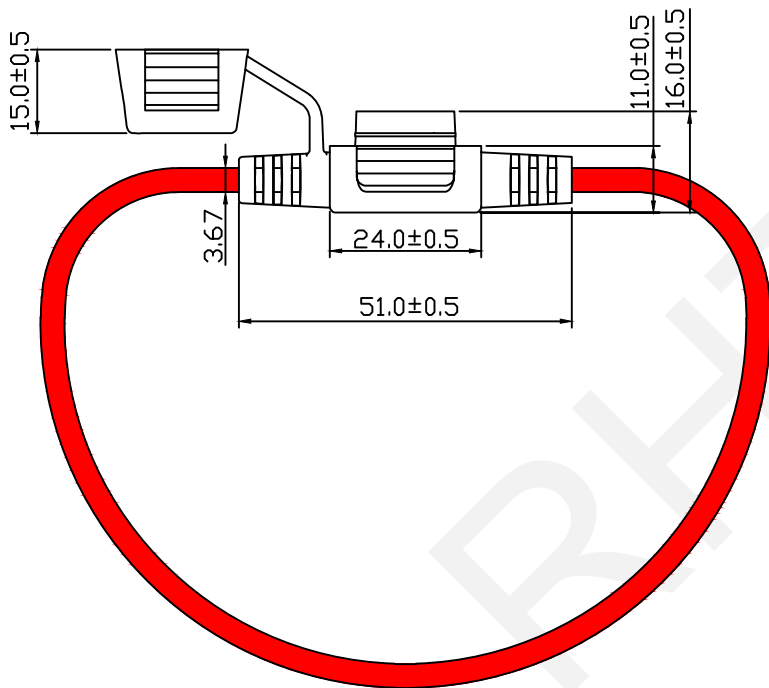
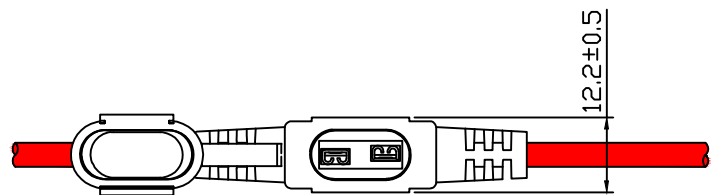


Characteristics:

Voltage Rating: 32V

Current Rating: 30A Max.

Insulation Resistance: 100MΩ Min. at 500VDC

Dielectric Strength: AC 1000 V Min. at 60s

Fuse type:

Medium Blade Fuse: RHTDY-269-xxx

Order Information:

RHTDY- 707 -XX R xxx

Wire AWG:

12- 12AWG for 30A Max.

14- 14AWG for 20A Max.

16- 16AWG for 15A Max.

18- 18AWG for 10A Max.

20- 20AWG for 5A Max.

Cable Color: R- Red

Cable Long: 300-300mm

Item	P/N	Describe&Material	Q'ty
1	Housing	Housing For Fuse,PVC,Black	1
2	Terminal	Female Terminal,Brass T=0.3mm, Tin Plated	2
3	Cable	UL 1015 PVC Cable 12~20AWG Red,L=300mm	1

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Miniature Blade Fuse Holder With Cable

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTDY-707-xxR300