


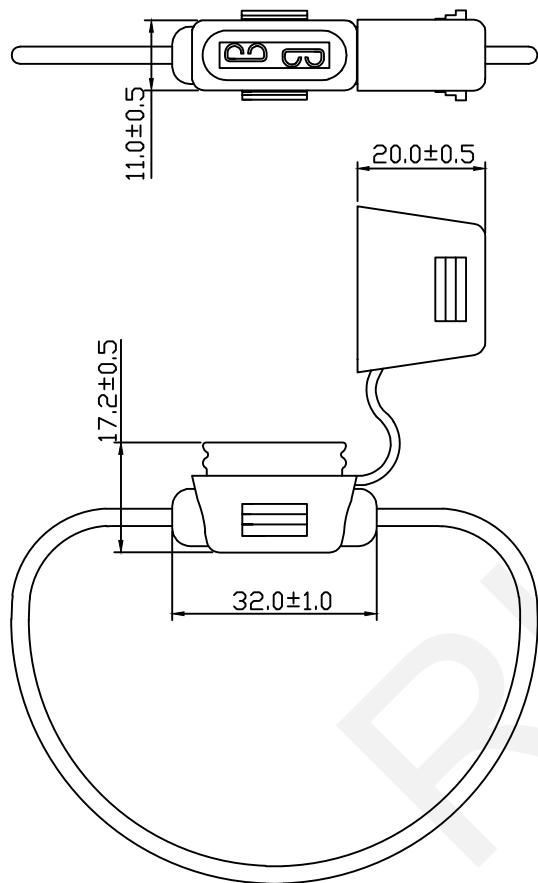

#### Characteristics:

Voltage Rating: 32V

Current Rating: 30A Max.

Insulation Resistance: 100MΩ Min. at 500VDC

Dielectric Strength: AC 1000 V Min. at 60s

#### Fuse type:

Medium Blade Fuse: RHTDY-270-xxx

#### Order Information:

RHTDY- 708B-XX R xxx

#### Wire AWG:

12- 12AWG for 30A Max.

14- 14AWG for 20A Max.

16- 16AWG for 15A Max.

18- 18AWG for 10A Max.

20- 20AWG for 5A Max.

Cable Color: R- Red

Cable Long: 300-300mm

| Item | P/N      | Describe&Material                                      | Q'ty |
|------|----------|--------------------------------------------------------|------|
| 1    | Housing  | Housing For Fuse, Rubber, Black                        | 1    |
| 2    | Terminal | 250 Type Female Terminal, Brass T=0.4mm, Nickel Plated | 2    |
| 3    | Cable    | UL 1015 PVC Cable 12~20AWG Red, L=300mm                | 1    |

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Miniature Blade Fuse Holder With Cable

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTDY-708B-xxR300