
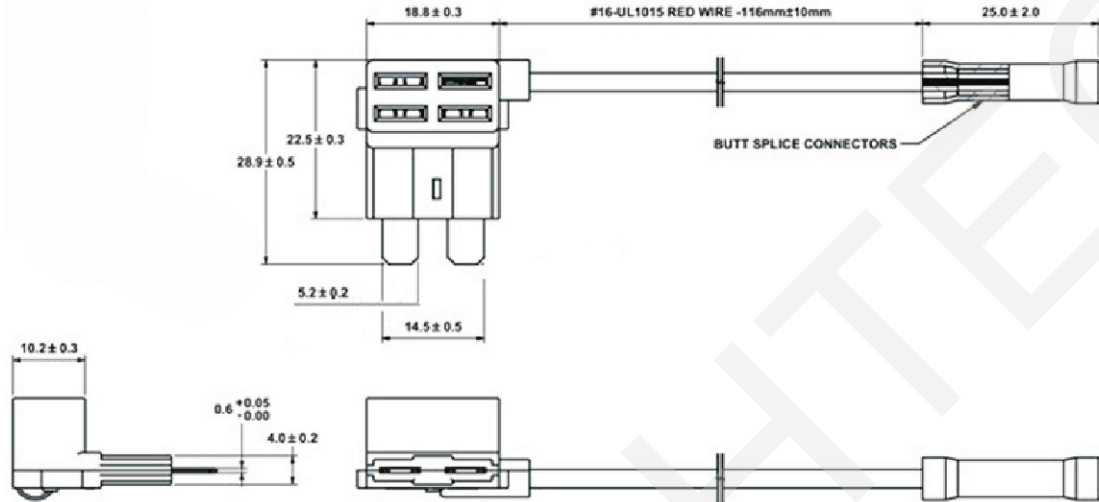



	1	2	3	4	5	6	7	8	9	
A										A
B										B
C						Specification: Rating: 15 amps Cable: 16AWG UL1015 Butt Splice Connector pull-out force min. 15 kg RoHS Compliant Fuse Type: ATD Standard Blade Fuse 120mm red cable terminated with blue butt connector Keeps warranty intact as no soldering is required, also making it a safer alternative. Also known as: Piggy back fuses, or fuse taps. N.B - Fuses not included.				C
D										D
E										E
F										F
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	Medium Circuit Fuse Holder Piggyback		G
				0~3	3~18	18~50	50~120	CHK'D BY FENG	 RHTDY-ACU	
				±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN		
	1	2	3	4	5	6	7	8	9	

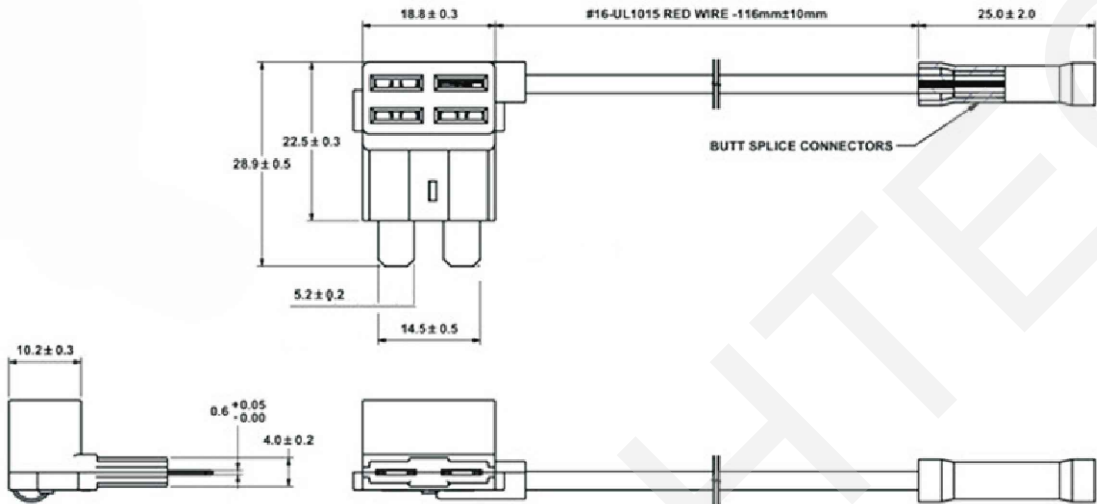

Specification:
Rating: 15 amps
Cable: 16AWG UL1015
Butt Splice Connector pull-out force min. 15 kg
RoHS Compliant
Fuse Type: ATD Standard Blade Fuse
120mm red cable terminated with blue butt connector
Keeps warranty intact as no soldering is required,
also making it a safer alternative.
Also known as: Piggy back fuses, or fuse taps.
N.B - Fuses not included.